
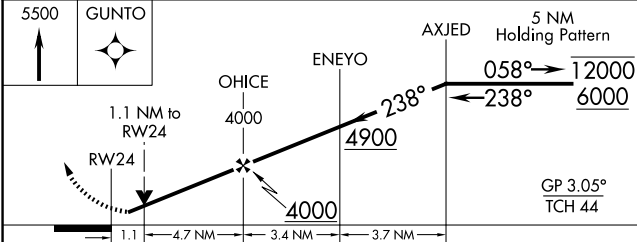


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>86227</b><br><b>W24A</b> | APP CRS<br><b>238°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6201</b><br><b>2087</b><br><b>2105</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 24  
NEW RIVER VALLEY (PSK)

|                                                                                                                                                                                                                                        |                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                        | MISSED APPROACH: Climb to 5500 direct GUNTO and hold, continue climb-in-hold. |
| Circling NA for Cat D northwest of Rwy 6-24. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 24 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using BCB altimeter setting. |                                                                               |

|                          |                                       |                                  |                                 |
|--------------------------|---------------------------------------|----------------------------------|---------------------------------|
| AWOS-3<br><b>127.375</b> | ROANOKE APP CON<br><b>126.0 339.8</b> | ROANOKE CLNC DEL<br><b>121.7</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|---------------------------------------|----------------------------------|---------------------------------|

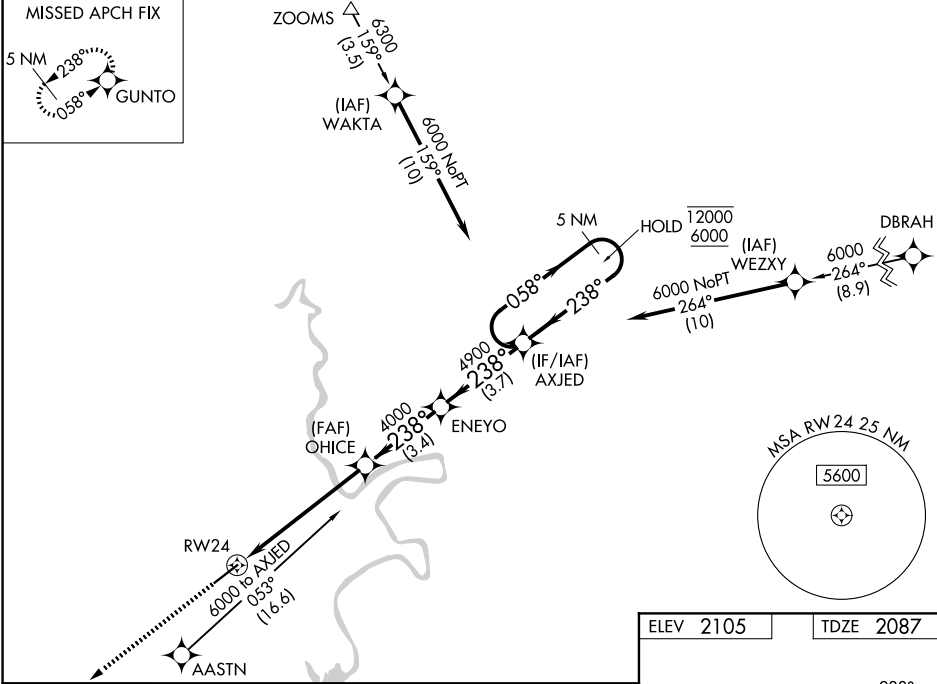

| CATEGORY      | A                     | B                     | C                     | D                       |
|---------------|-----------------------|-----------------------|-----------------------|-------------------------|
| LPV DA        | 2337-1                | 250 (300-1)           |                       |                         |
| LNAV/ VNAV DA | 2502-1½               | 415 (400-1½)          |                       |                         |
| LNAV MDA      | 2480-1                | 393 (400-1)           | 2480-1½               | 393 (400-1½)            |
| CIRCLING      | 2640-1<br>535 (600-1) | 2680-1<br>575 (600-1) | 2780-2<br>675 (700-2) | 2780-2¼<br>675 (700-2¼) |

