


APP CRS	Rwy Ldg	11500
011°	TDZE	286
	Apt Elev	312

RNAV (RNP) Z RWY 1C
WASHINGTON DULLES INTL (IAD)

RNP AR APCH - GPS. Authorization required.	MALSR	MISSED APPROACH: Climb to 4000 direct CHDMN and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALPS, increase RNP 0.11 all Cats visibility to RVR 4000.		

D-ATIS	POTOMAC APP CON	DULLES TOWER	GND CON
134.85	120.45 306.925 (241°-330°)	120.1 317.8 (Rwy 1R/19L)	121.9 317.8 (EAST)
	128.525 306.925 (091°-240°)	120.25 348.6 (Rwy 1C/19C)	121.625 348.6 (WEST)
	126.1 338.25 (331°-090°)	134.425 348.6 (Rwys 1L/19R and 12/30)	

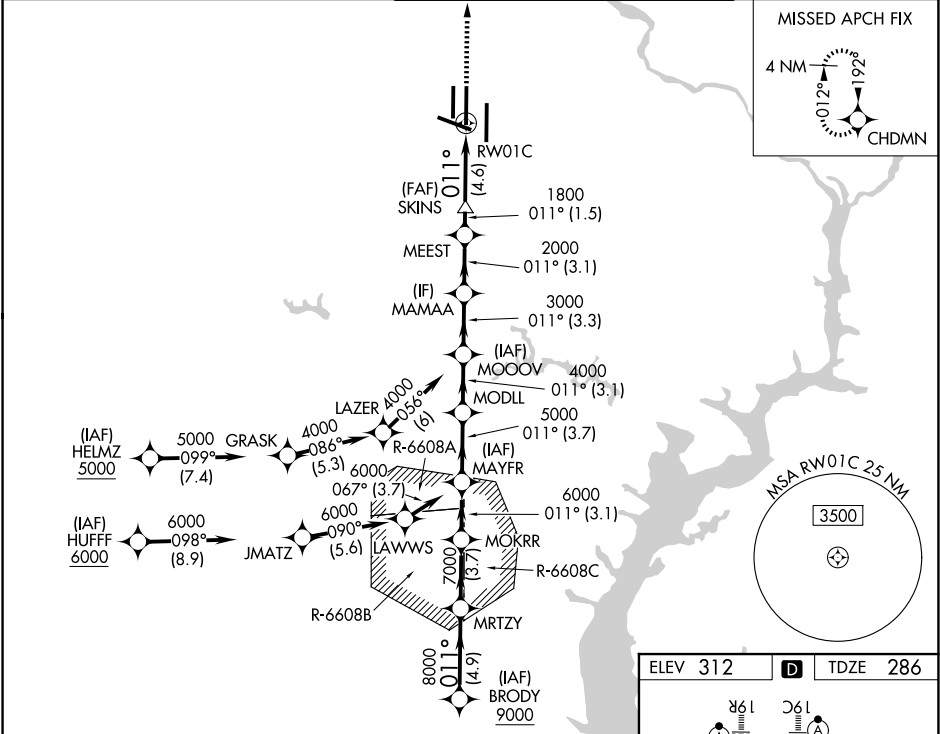

BRODY 9000		MRTZY 7000		MOKRR 6000		MAYFR 5000		MODLL 4000		MOOOV 3000		MAMAA 2000		MEEST 1800		SKINS 1800		RWY 1C	
GP 3.00°		TCH 54		TCH 54		TCH 54		TCH 54		TCH 54		TCH 54		TCH 54		TCH 54		TCH 54	
CATEGORY		A		B		C		D											
RNP 0.11 DA		540/24		254 (300-½)															
RNP 0.30 DA		730/45		444 (500-¾)															
AUTHORIZATION REQUIRED																			

