


WAAS CH 45531 W02A	APP CRS 015°	Rwy Ldg 6451 TDZE 751 Apt Elev 759
--	------------------------	---

RNAV (GPS) RWY 2R
DUPAGE (DPA)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Auroral altimeter setting: increase LPV DA to 1038 feet, LNAV/VNAV DA to 1148 feet and visibility LNAV/VNAV all Cats ¼ SM; increase all MDA 40 feet and visibility LNAV Cat C/D visibility ½ SM and Circling Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Auroral altimeter setting. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH:
Climb to 1300 then
climbing left turn to
3000 direct NUELG
and hold.

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8
-----------------	--------------------------------	-----------------------------	------------------

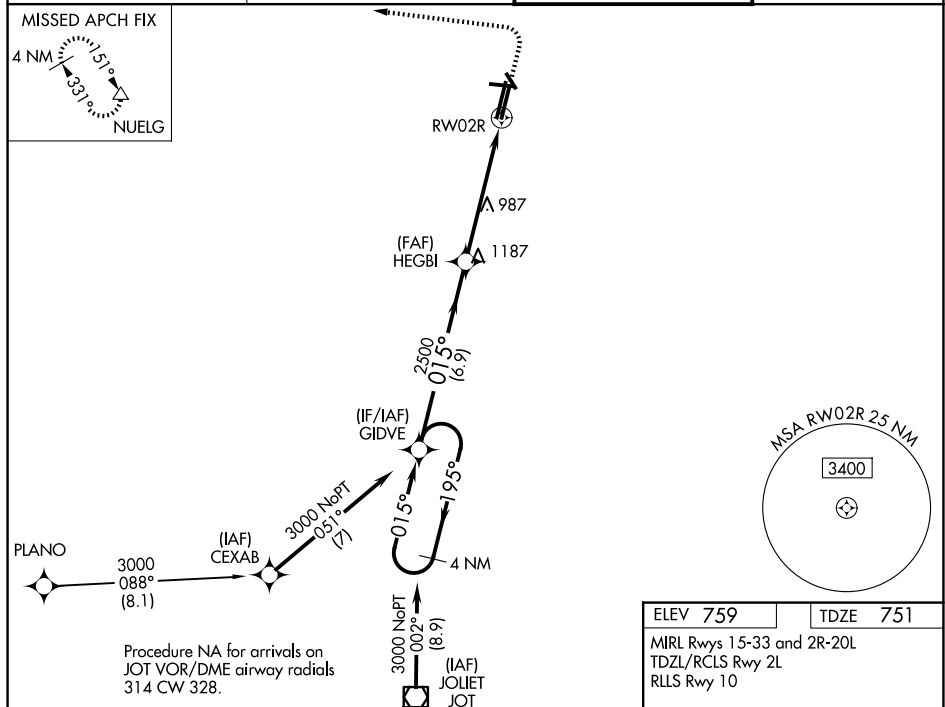

4 NM Holding Pattern GIDVE HEGBI RW02R

3000 ← 195° 015° → 015° 2500 2500 6.9 NM 5.3 NM

GP 3.00° TCH 50

1300 3000 NUEL

CATEGORY	A	B	C	D
LPV DA	1001-1		250 (300-1)	
INAV/VNAV DA	1111-1 $\frac{1}{8}$		360 (400-1 $\frac{1}{8}$)	
INAV MDA	1240-1	489 (500-1)	1240-1 $\frac{1}{8}$	489 (500-1 $\frac{1}{8}$)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2 $\frac{1}{4}$ 701 (800-2 $\frac{1}{4}$)

