

WAAS CH 99602 W22A	APP CRS 218°	Rwy Ldg 11001 TDZE 964 Apt Elev 964
--	------------------------	--

RNAV (GPS) RWY 22
GREENVILLE SPARTANBURG INTL (GSP)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. When local altimeter setting not received, use Greenville downtown altimeter setting: increase LPV DA to 1193 feet; increase LNAV/VNAV DA to 1267 feet; increase all MDA 40 feet and LNAV Cat C/D visibility to RVR 4000; increase Circling Cat D visibility to 2½ SM. For inop ALS, when using Greenville downtown altimeter setting, increase LNAV/VNAV all Cats visibility to RVR 4500. VDP and Baro-VNAV NA when using Greenville downtown altimeter setting.

MALS®



MISSED APPROACH:
Climb to 3000 direct
OXABY and hold.

ATIS 134.25	GREER APP CON★ 118.8 270.275	GREER TOWER ★ 120.1 (CTAF) 0 251.15	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

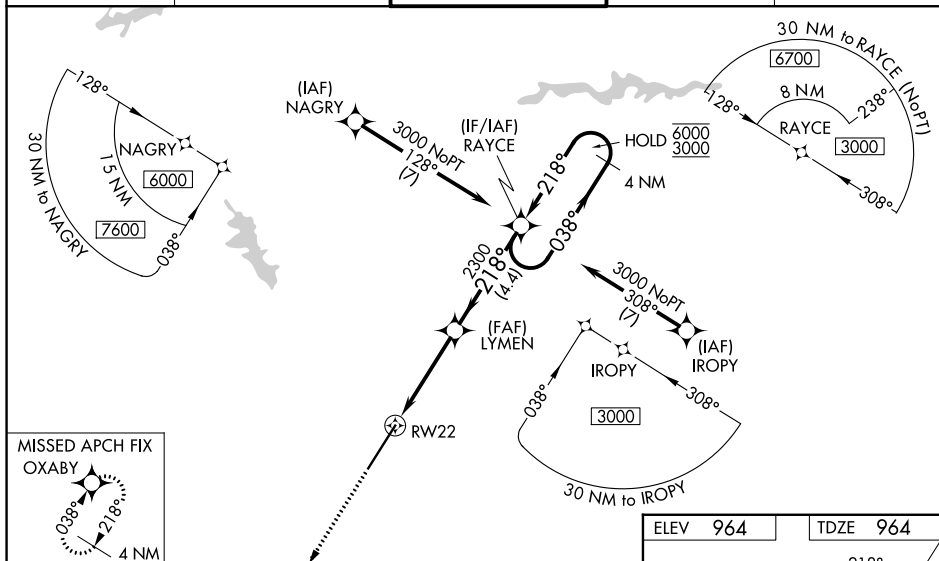

MISSED APCH FIX

3000	OXABY
	

* LNAV only.

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 76).

RAYCE
|
4 NM
Holding Pattern

LYMEN

[illegible]

RW22

2300
|

18°—


←218

3000

GP 3.00°

TCH 61

CATEGORY		A	B	C	D
LPV	DA	1164/24		200 (200-½)	
LNAV/ VNAV	DA	1238/24		274 (300-½)	
LNAV	MDA	1360/24	396 (400-½)	1360/35	396 (400-¾)
CIRCLING		1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)

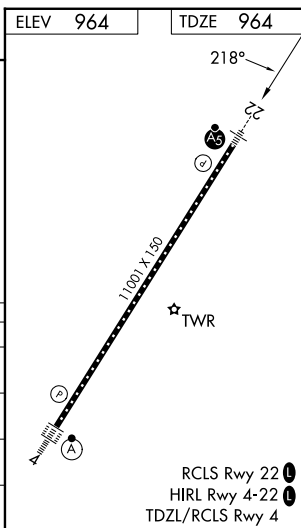RCLS Rwy 22 **L**HIRL Rwy 4-22 **L**

TDZL/RCLS Rwy 4

RNAV (GPS) RWY 22