WAAS CH 63139 W11A	APP CRS 111°	Rwy Ldg 4000 TDZE 775 Apt Elev 777


RNAV (GPS) RWY 11
AUBURN UNIVERSITY RGNL (AUO)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using CSG altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 29 NA at night. When local altimeter setting not received, use CSG altimeter setting: increase LPV DA to 1139 feet; increase LNAV/VNAV DA to 1334 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cats C/D ¼ SM and Circling Cat C/D visibility ½ SM.

MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct HESEL and hold.

AWOS-3PT	ATLANTA APP CON ★	AUBURN TOWER ★	GND CON ★	UNICOM
132.575	125.5 323.1	123.875 (CTAF) L	121.625	123.0

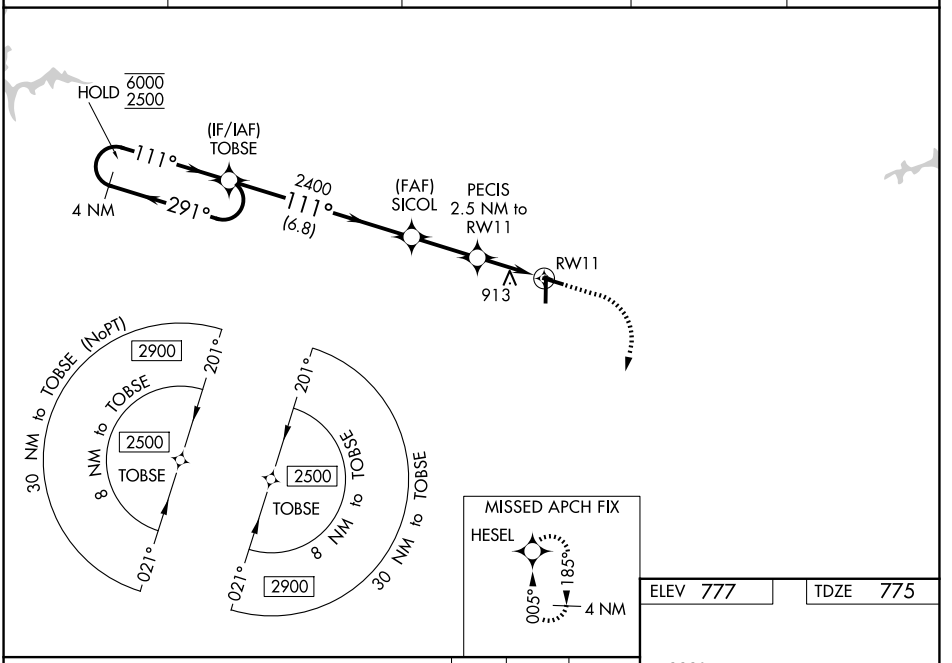

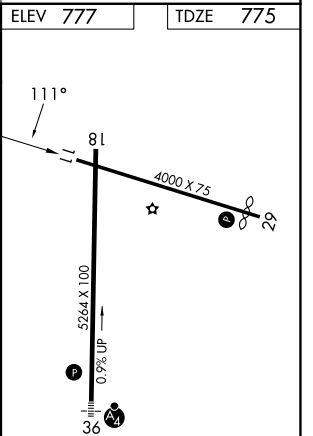

CATEGORY	A	B	C	D
LPV DA	1025-1 250 (300-1)			
LNAV/VNAV DA	1220-1⅜ 445 (500-1⅜)			
LNAV MDA	1220-1 445 (500-1)		1220-1⅜ 445 (500-1⅜)	
CIRCLING	1280-1 503 (600-1)	1360-1 583 (600-1)	1380-1¾ 603 (700-1¾)	1440-2 663 (800-2)

SE-4, 01 OCT 2026 to 29 OCT 2026