


LOC I-ECC 110.1	APP CRS 200°	Rwy Ldg TDZE Apt Elev	8653 5605 5622
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 20
CEDAR CITY RGNL(CDC)

DME required.	MALSR	MISSED APPROACH: Climb to 6200 then climbing right turn to 10000 on heading 322° and on EHK R-278 to BERYL INT/EHK 16.5 DME and hold, continue climb-in-hold to 10000. † Missed approach requires minimum climb of 210 feet per NM to 7300.
▼ NA XOJPO fix minimums (Dual VOR receivers required): For inop ALS, increase S-LOC 20 Cats C/D visibility to 1½ SM. For inop ALS, increase S-LOC 20 Cats C/D visibility to 2½ SM. #For inop ALS, increase S-ILS 20 visibility all Cats to 1 SM.		

ASOS 119.025	SALT LAKE CITY CENTER 125.575 379.275	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

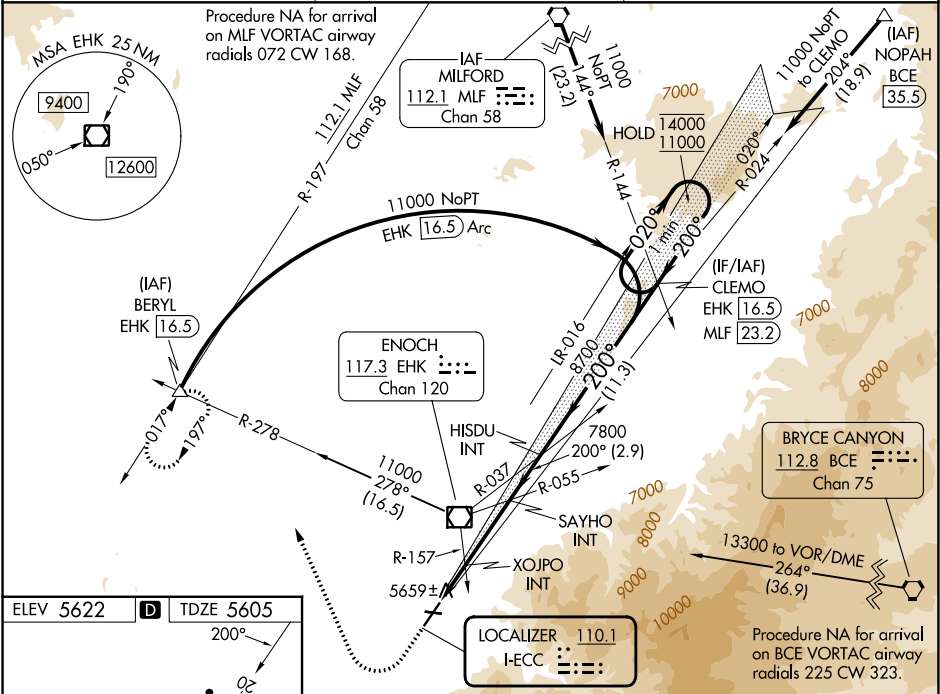

ELEV 5622	TDZE 5605
FAF to MAP 6.7 NM	
Knots	60 90 120 150 180
Min:Sec	6:42 4:28 3:21 2:41 2:14

6200	10000	EHK R-278	BERYL	CLEMO	One Minute Holding Pattern
*LOC only		SAYHO INT	HISDU INT	020° → 14000 ← 200° 11000	
XOJPO INT		7800	8700	GS 3.00° TCH 47	
6440*		7800			
-2.4 NM		-4.3 NM	-2.9 NM	11.3 NM	
CATEGORY	A	B	C	D	
S-ILS 20†	5825-½ 220 (300-½)				
S-ILS 20 #	5882-½ 277 (300-½)				
S-LOC 20	6440-½ 835 (900-½)	6440-¾ 835 (900-¾)	6440-1⅞ 835 (900-1⅞)		
XOJPO FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 20	6100-½ 495 (500-½)		6100-1 495 (500-1)		

SW-4, 01 OCT 2026 to 29 OCT 2026

SW-4, 01 OCT 2026 to 29 OCT 2026