
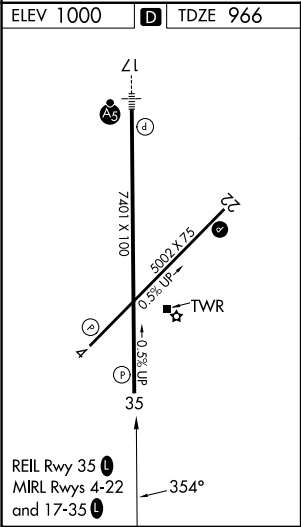


WAAS CH 42633 W35A	APP CRS 354°	Rwy Ldg TDZE Apt Elev	7401 966 1000
--	------------------------	-----------------------------	--

RNAV (GPS) RWY 35
STILLWATER RGNL (SWO)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct ACOKO and hold.
T Baro-VNAV and VDP NA when using Ponca City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Ponca City altimeter setting: increase LPV DA to 1246 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1336 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cats C/D ¼, and Circling visibility Cat D ¼ SM.		

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

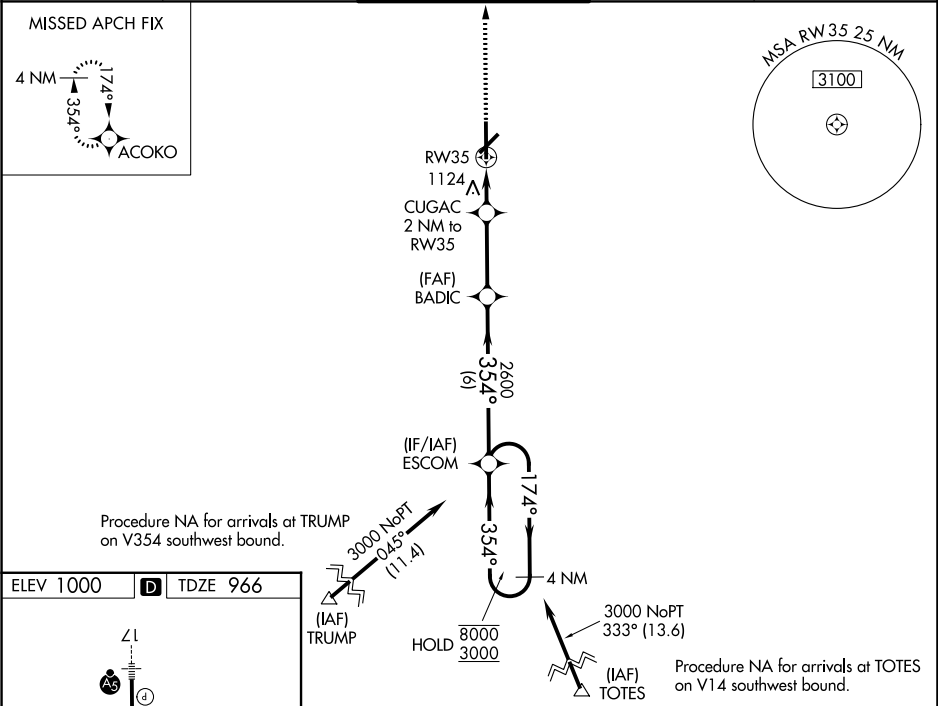

3000 ↑ ACOKO ✦		4 NM Holding Pattern			
1.2 NM to RW35 1.2 NM to RW35 1.2 NM 0.8 NM 3 NM 6 NM		CUGAC 2 NM to RW35	BADIC 2600	ESCOM	174°→ ←354° 8000 3000 GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	1166-¾		200 (200-¾)		
LNAV/ VNAV DA	1256-1		290 (300-1)		
LNAV MDA	1380-1	414 (400-1)	1380-1½	414 (400-1½)	
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-1½)	1740-2¼ 740 (800-2¼)	