VOR/DME SWO	APP CRS	Rwy Ldg 7401
108.4	356°	TDZE 966
Chan 21		Apt Elev 1000

VOR/DME RWY 35


STILLWATER RGNL (SWO)


T When local altimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet; S-35 Cats C/D visibility ¼ mile; Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting.


A

MISSED APPROACH: Climb to 2600 direct SWO VOR/DME and hold.

ASOS	KANSAS CITY CENTER	STILLWATER TOWER ★	GND CON	UNICOM
135.725	127.8 319.1	125.35 (CTAF) L	121.6	122.95

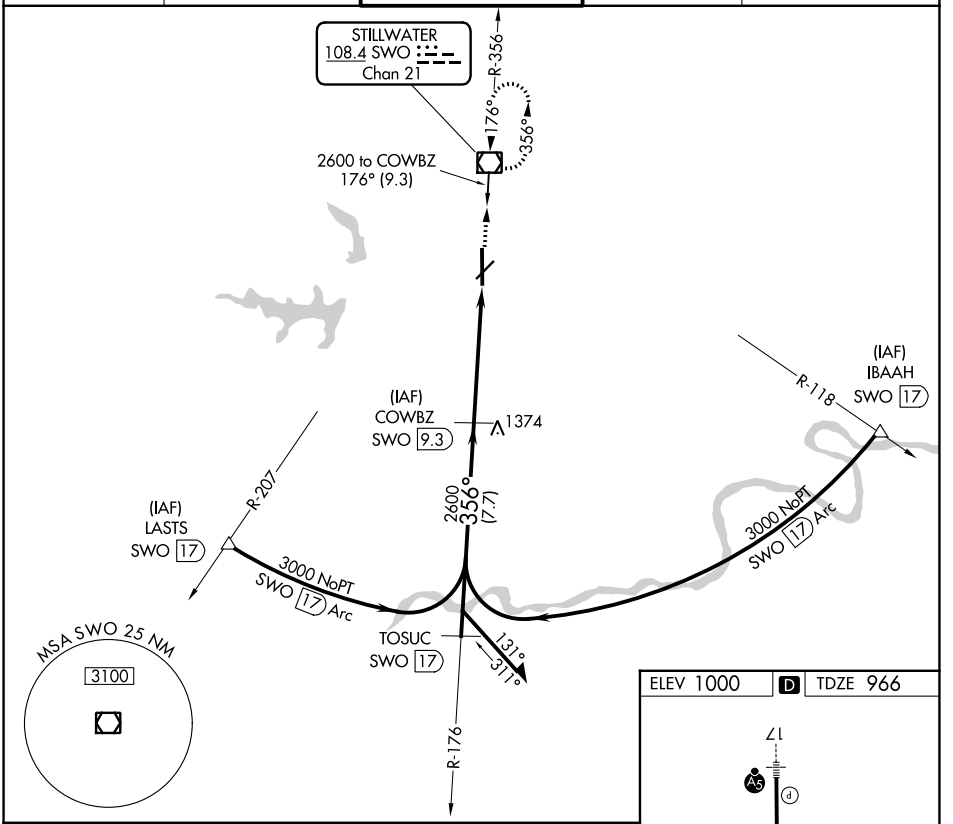

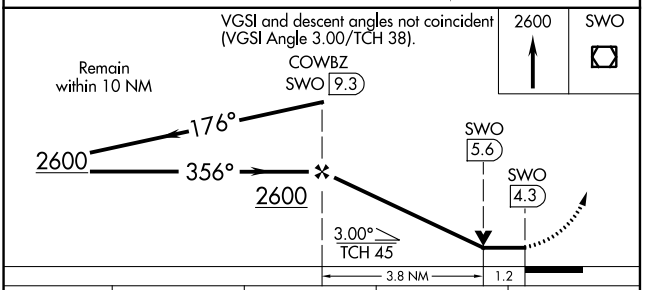

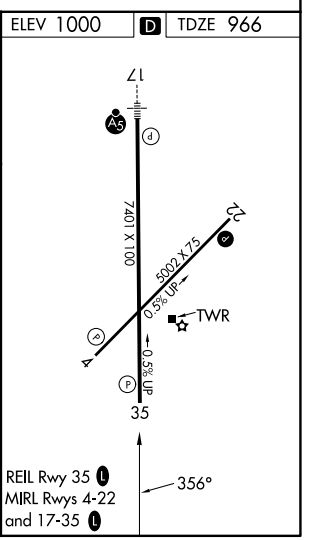

CATEGORY	A	B	C	D
S-35	1380-1 414 (400-1)		1380-1¼ 414 (400-1¼)	
CIRCLING	1420-1 420 (500-1)	1460-1 460 (500-1)	1520-1½ 520 (600-1½)	1740-2¼ 740 (800-2¼)

SC-1, 01 OCT 2026 to 29 OCT 2026
SC-1, 01 OCT 2026 to 29 OCT 2026