WAAS	APP CRS	Rwy Ldg	7002
CH 99711	313°	TDZE	1389
W31A		Apt Elev	1391

RNAV (GPS) RWY 31

BEMIDJI RGNL (BJI)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1¼ SM.

MALSR

MISSED APPROACH: Climb to 3200 direct TEGAE and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
119.275	134.75 251.1	122.8 (CTAF) L

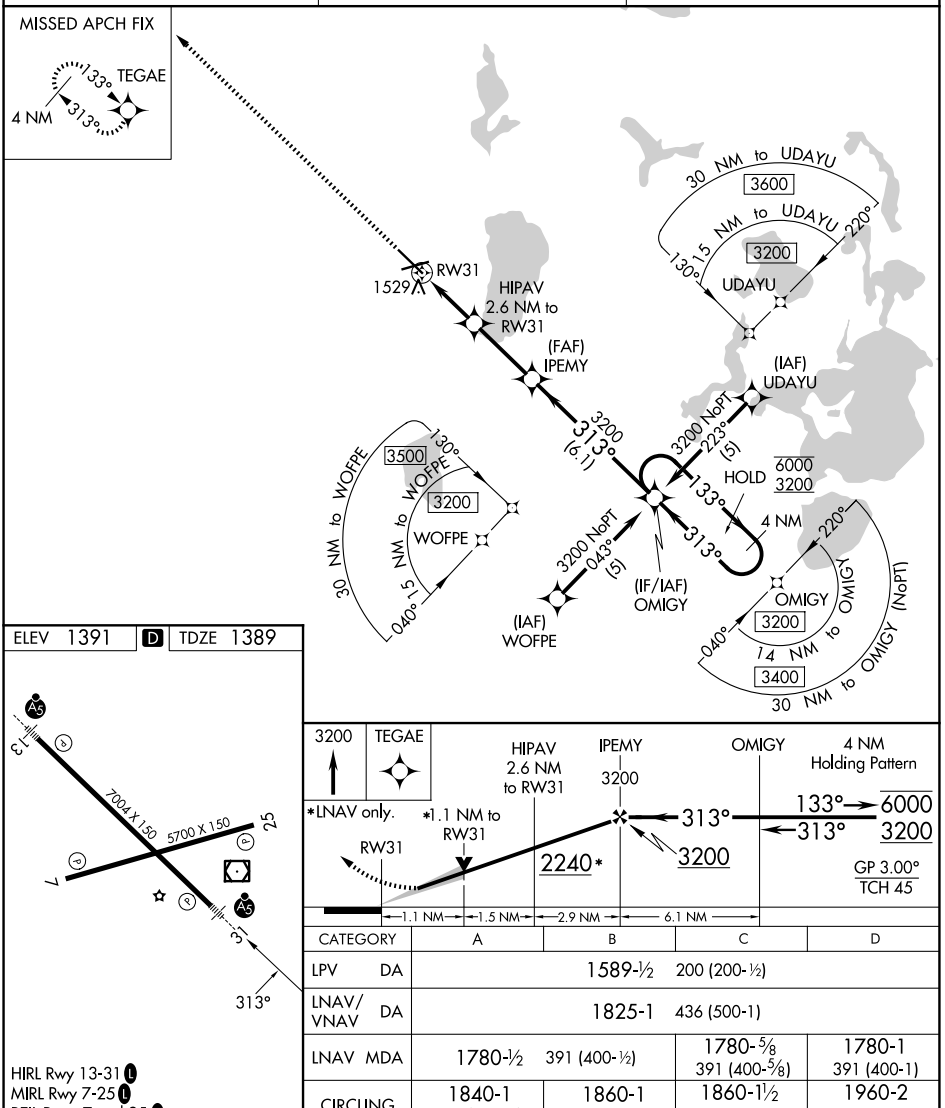

CATEGORY	A	B	C	D
LPV DA	1589-½ 200 (200-½)			
LNAV/VNAV DA	1825-1 436 (500-1)			
LNAV MDA	1780-½ 391 (400-½)		1780-⅝ 391 (400-⅝)	1780-1 391 (400-1)
CIRCLING	1840-1 449 (500-1)	1860-1 469 (500-1)	1860-1½ 469 (500-1½)	1960-2 569 (600-2)

NC-1, 01 OCT 2026 to 29 OCT 2026
NC-1, 01 OCT 2026 to 29 OCT 2026