WAAS	APP CRS	Rwy Ldg	5002
CH 82608	167°	TDZE	294
W17A		Apt Elev	295

RNAV (GPS) RWY 17
TACOMA NARROWS (TIW)


RNP APCH.


VDP NA with McChord Fld altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to 1⅛ mile. Circling NA east of Rwy 17/35.
Baro-VNAV NA when using McChord Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use McChord Fld altimeter setting and increase all DA 25 feet, all MDA 40 feet, and increase LPV all Cats visibility ⅛ mile.


MALSR

MISSED APPROACH: Climb to 4000 direct WAPGI and right turn via 285° track to CARRO and hold, continue climb-in-hold to 4000.

ATIS	SEATTLE APP CON	TACOMA TOWER ★	GND CON	UNICOM
124.05	120.1 290.9	118.5 (CTAF) L 253.5	121.8	122.95

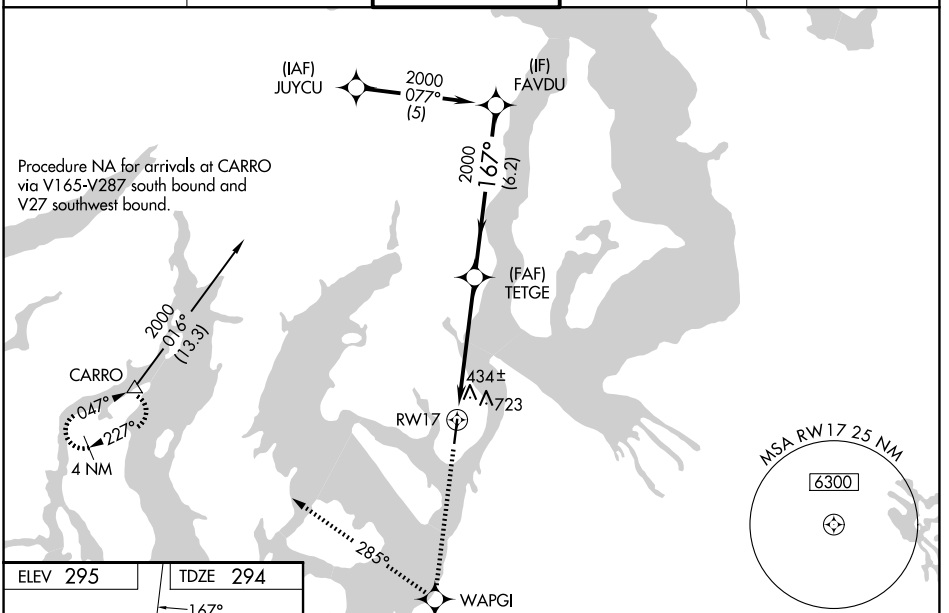

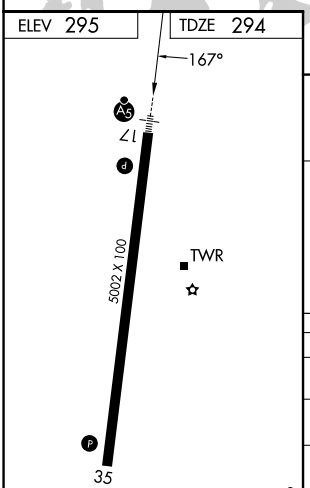

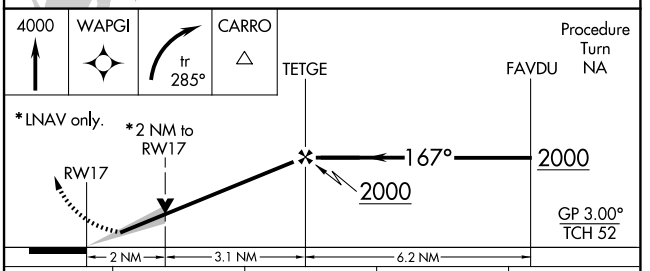

CATEGORY	A	B	C	D
LPV DA	638-⅝ 344 (400-⅝)			
LNAV/VNAV DA	992-2 698 (700-2)			
LNAV MDA	980-½ 686 (700-½)		980-1½ 686 (700-1½)	
CIRCLING	980-1 685 (700-1)		980-2 685 (700-2)	980-2¼ 685 (700-2¼)

NW-1, 01 OCT 2026 to 29 OCT 2026
NW-1, 01 OCT 2026 to 29 OCT 2026