

LOC/DME I-GFK	APP CRS	Rwy Ldg	7351
109.1	174°	TDZE	843
Chan 28		Apt Elev	845

LOC BC RWY 17R



GRAND FORKS INTL (GFK)

DME or ADF or RADAR required.

When local altimeter setting not received, use Crookston altimeter setting and increase all MDA 80 feet; increase S-17R Cat C visibility 1/8 SM and Circling Cat C visibility 1/4 SM. Increase WUSIK fix minimums S-17R Cat C visibility and Circling Cat C visibility 1/4 SM.

MISSED APPROACH: Climb to 2600 on I-GFK south course (174°) to HISER LOM/I-GFK 6.9 DME/RADAR and hold.

ATIS	GRAND FORKS APP CON *	GRAND FORKS TOWER ★	GND CON	UNICOM
119.4	118.1 318.1	118.4 (CTAF) 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	124.575	122.95

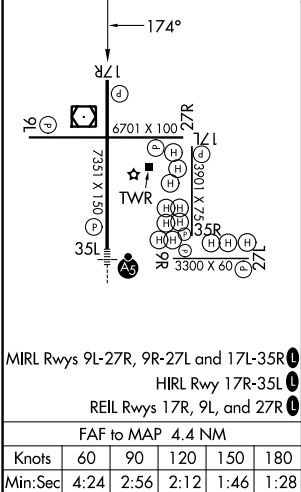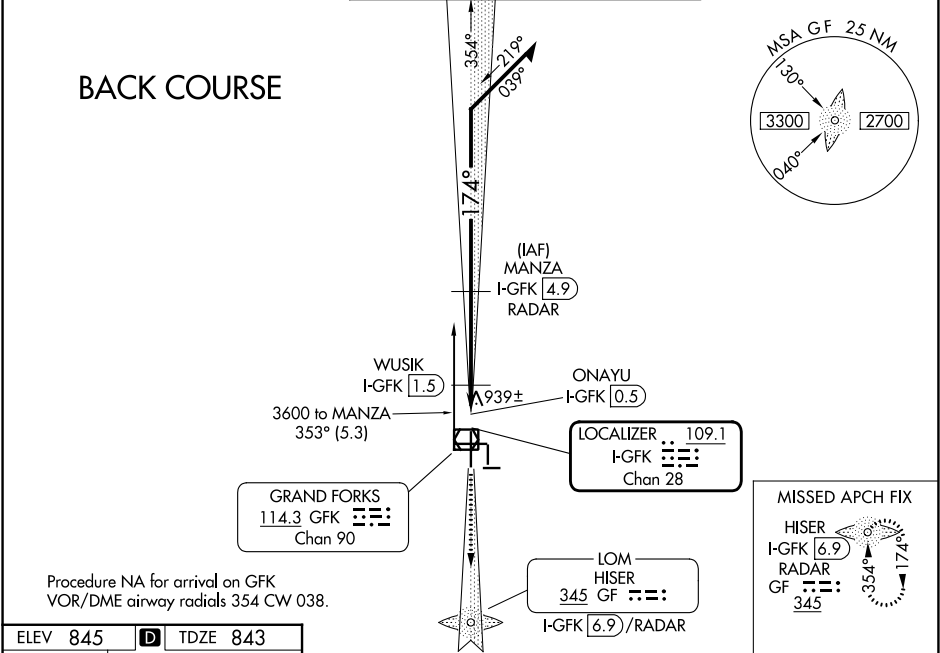

Disregard glideslope indications. Remain within 10 NM				
*1380 when using Crookston altimeter setting.				
CATEGORY	A	B	C	D
S-17R	1300-1	457 (500-1)	1300-1 3/8 457 (500-1 3/8)	1300-1 1/2 457 (500-1 1/2)
CIRCLING	1300-1	455 (500-1)	1400-1 1/2 555 (600-1 1/2)	1420-2 575 (600-2)
WUSIK FIX MINIMUMS				
S-17R	1200-1 357 (400-1)			1200-1 1/4 357 (400-1 1/4)
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1 1/2 555 (500-1 1/2)	1420-2 575 (600-2)