

WAAS CH 78104 W27A	APP CRS 264°	Rwy Ldg TDZE 843 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 27R

GRAND FORKS INTL (GFK)

RNP APCH - GPS.



▼

▲

Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1104 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 1178 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D $\frac{3}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 4000 direct DUCEV and hold, continue climb-in-hold to 4000.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	GND CON 124.575	UNICOM 122.95
----------------------	---	--	---------------------------	-------------------------

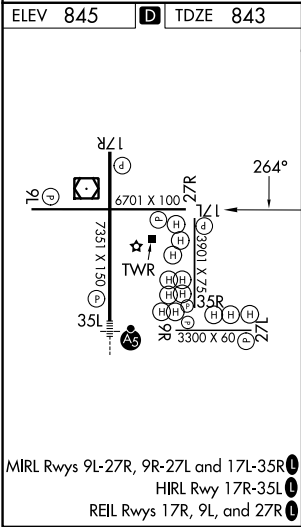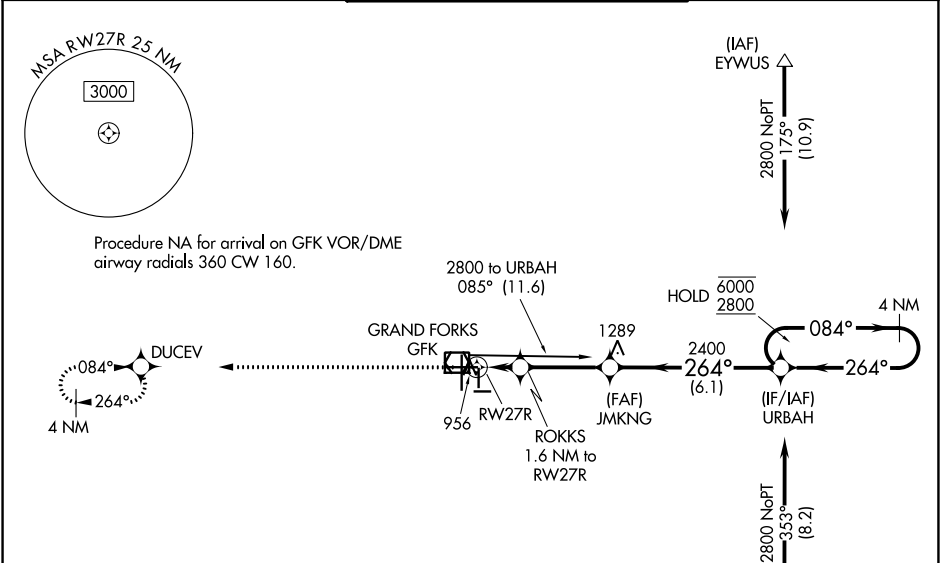

4000	DUCEV	ROKKS 1.6 NM to RW27R	JMKNG 2400	URBAH 4 NM Holding Pattern	GP 3.00° TCH 44
1	0.6	3.2 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	1043- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)			
LNAV/VNAV DA	1117- $\frac{7}{8}$	274 (300- $\frac{7}{8}$)			
LNAV MDA	1220-1	377 (400-1)			
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)	