

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>50301</b><br><b>W25A</b> | APP CRS<br><b>246°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>515</b><br><b>529</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 25

AIKEN RGNL (AIK)

RNP APCH.

▼



▲ NA

Baro-VNAV NA when using Augusta Rgnl at Bush Fld altimeter setting.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 40°C. VDP NA with Augusta Rgnl at Bush Fld altimeter setting: increase LPV all Cats DA to 869 feet, LNAV/VNAV all Cats DA to 927 feet and all visibilities ¾ mile; increase all MDA 120 feet and Cat C/D visibilities ¼ mile. For inop ODALS, increase LPV all Cats visibility to ¾ mile, LNAV/VNAV all Cats to 1½ mile and LNAV Cat C/D to 1¼ mile. For inop ODALS when using Augusta Rgnl at Bush Fld altimeter setting, increase LPV all Cats visibility to 1¼ mile, LNAV/VNAV all Cats to 1½ mile and LNAV Cat D to 1¾ mile.

ODALS

MISSED APPROACH:  
Climb to 3000 direct  
VIXLY and hold.

|                            |                                           |                               |
|----------------------------|-------------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.025</b> | AUGUSTA APP CON★<br><b>119.15 284.625</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|-------------------------------------------|-------------------------------|

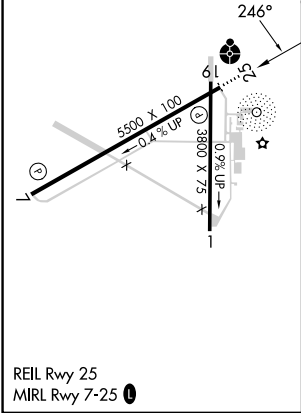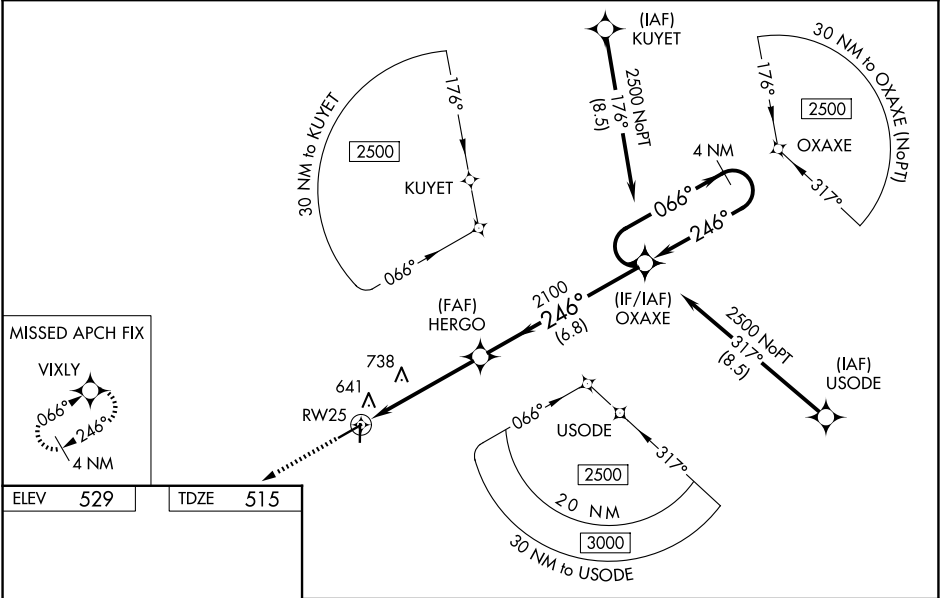

|              |                   |                                                                     |                     |                      |  |
|--------------|-------------------|---------------------------------------------------------------------|---------------------|----------------------|--|
| 3000         | VIXLY             | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 27). |                     | 4 NM Holding Pattern |  |
| *LNAV only.  |                   | HERGO 2100                                                          | OXAXE 2500          | GP 3.00°<br>TCH 45   |  |
| RW25         |                   | 2100                                                                | 2100                |                      |  |
| 1.3          |                   | 3.6 NM                                                              | 6.8 NM              |                      |  |
| CATEGORY     | A                 | B                                                                   | C                   | D                    |  |
| LPV DA       | 765-¾             |                                                                     | 250 (300-¾)         |                      |  |
| LNAV/VNAV DA | 823-1             |                                                                     | 308 (300-1)         |                      |  |
| LNAV MDA     | 940-¾ 425 (500-¾) |                                                                     | 940-1⅛ 425 (500-1⅛) |                      |  |

SE-2, 01 OCT 2026 to 29 OCT 2026

SE-2, 01 OCT 2026 to 29 OCT 2026