


⚠

When local altimeter setting not received, use Pittsburgh Intl altimeter setting and increase MDAs 60 feet and visibility Circling Cats A and D ¼ SM and ZUDLO fix minimums S-28 Cats C/D ¼ SM and Circling Cat C ½ SM. Straight-in Rwy 28 NA at night, Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 then right turn direct EWC VOR/DME and hold.

ATIS 118.35	PITTSBURGH APP CON 124.75 338.2	BEAVER COUNTY TOWER ★ 120.3 (CTAF) 0	GND CON 121.8
----------------	------------------------------------	---	------------------

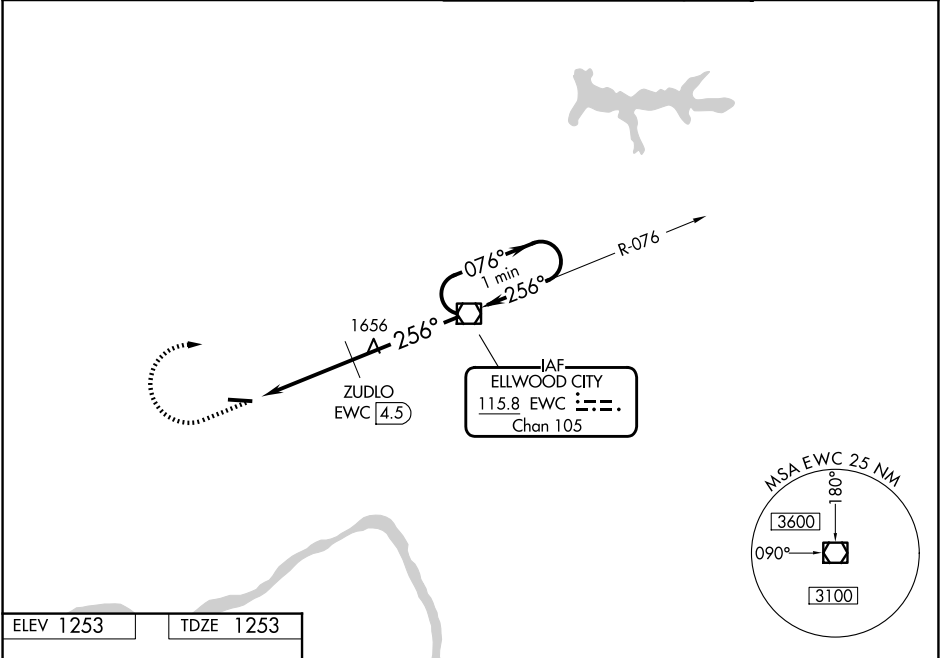

ELEV 1253	TDZE 1253	3000	EWC	EWC VOR/DME	One Minute Holding Pattern
MIRL Rwy 10-28 0 REIL Rwy 10 and 28 0		* 2120 when using Pittsburgh Intl altimeter setting.			
FAF to MAP 8.5 NM					
Knots	60	90	120	150	180
Min:Sec	8:30	5:40	4:15	3:24	2:50
CATEGORY	A	B	C	D	
S-28	2060-1 807 (900-1)	2060-1 ¼ 807 (900-1 ¼)	2060-2 ½	807 (900-2 ½)	
CIRCLING	2060-2	807 (900-2)	2060-2 ½	807 (900-2 ½)	
ZUDLO FIX MINIMUMS (DME REQUIRED)					
S-28	1740-1	487 (500-1)	1740-1 ⅓	487 (500-1 ⅓)	
CIRCLING	1740-1	487 (500-1)	1740-1 ½	567 (600-2)	

NE-4, 01 OCT 2026 to 29 OCT 2026

NE-4, 01 OCT 2026 to 29 OCT 2026