


WAAS CH 56223	APP CRS 028°	Rwy Ldg TDZE 888
W03A		Apt Elev 918

RNAV (GPS) RWY 3

APPLETON INTL (ATW)

RNP APCH - GPS.				MALSR 	MISSED APPROACH: Climb to 2700 direct ASIGE and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use GRB altimeter setting and increase LPV DA to 1219 feet and all visibilities to RVR 2600; increase LNAV/VNAV DA to 1313 feet and all visibilities to RVR 4000; increase all MDAs 100 feet and LNAV visibility Cat C/D ¾ SM and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using GRB altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cat C/D visibility to 1 ¾ SM.					
ATIS 127.15	GREEN BAY APP CON★ 126.3 338.2	APPLETON TOWER★ 119.6(CTAF) 0	GND CON 121.7	UNICOM 122.95	

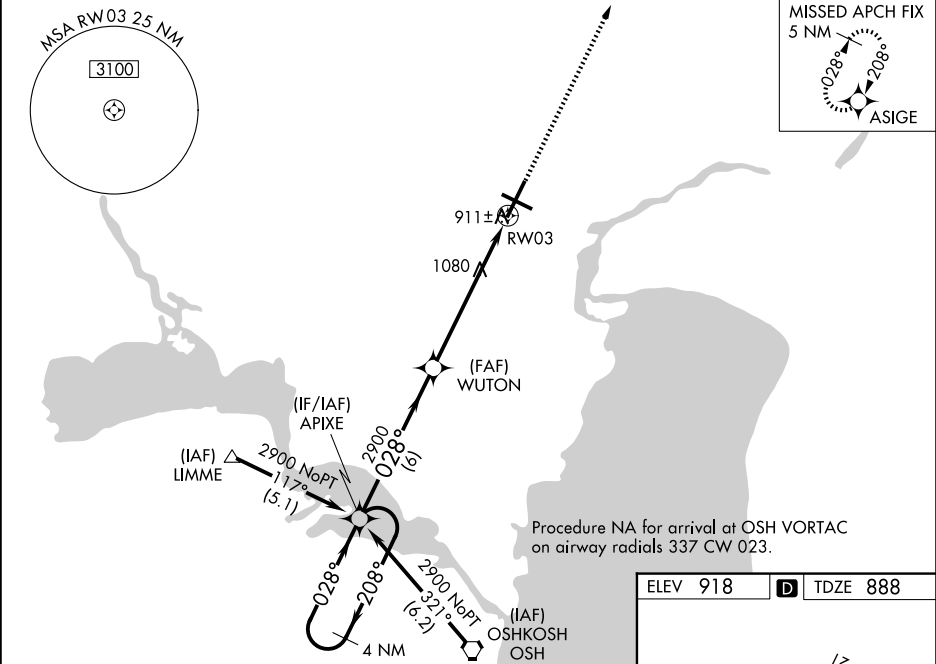

4 NM Holding Pattern		APIXE	WUTON	2700	ASIGE
2900 ← 208°		028° →	2900	1.5 NM to RW03	RW03
GP 3.00°		TCH 47	6 NM	4.6 NM	1.5 NM
CATEGORY	A	B	C	D	
LPV DA	1138/24		250 (300-½)		
LNAV/VNAV DA	1232/30		344 (400-¾)		
LNAV MDA	1400/24	512 (500-½)	1400/55	512 (500-1)	
CIRCLING	1400-1	482 (500-1)	1400-1½ 482 (500-1½)	1480-2 562 (600-2)	

