

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>61005</b><br><b>W21A</b> | APP CRS<br><b>207°</b> | Rwy Ldg<br>TDZE <b>980</b><br>Apt Elev <b>996</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 21



TOCCOA RG LETOURNEAU FLD (TOC)

RNP APCH

Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use Gainesville altimeter setting: Increase LPV DA to 1345 feet, LNAV/VNAV DA to 1510 feet, and increase all MDAs 120 feet, increase LNAV/LNAV visibility all Cats ½ SM, LNAV visibility Cats C/D ¾ SM and Circling visibility Cats A/B ¼ SM and Cat C ½ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH: Climb to 5800 direct ZIGIP and on track 295° to TALLE and hold, continue climb-in-hold to 5800.

|                          |                                       |                                 |
|--------------------------|---------------------------------------|---------------------------------|
| AWOS-3<br><b>119.625</b> | ATLANTA CENTER<br><b>134.8 379.95</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|---------------------------------------|---------------------------------|

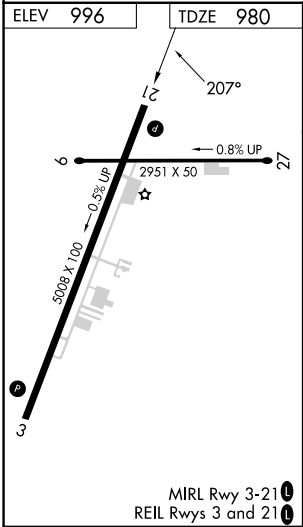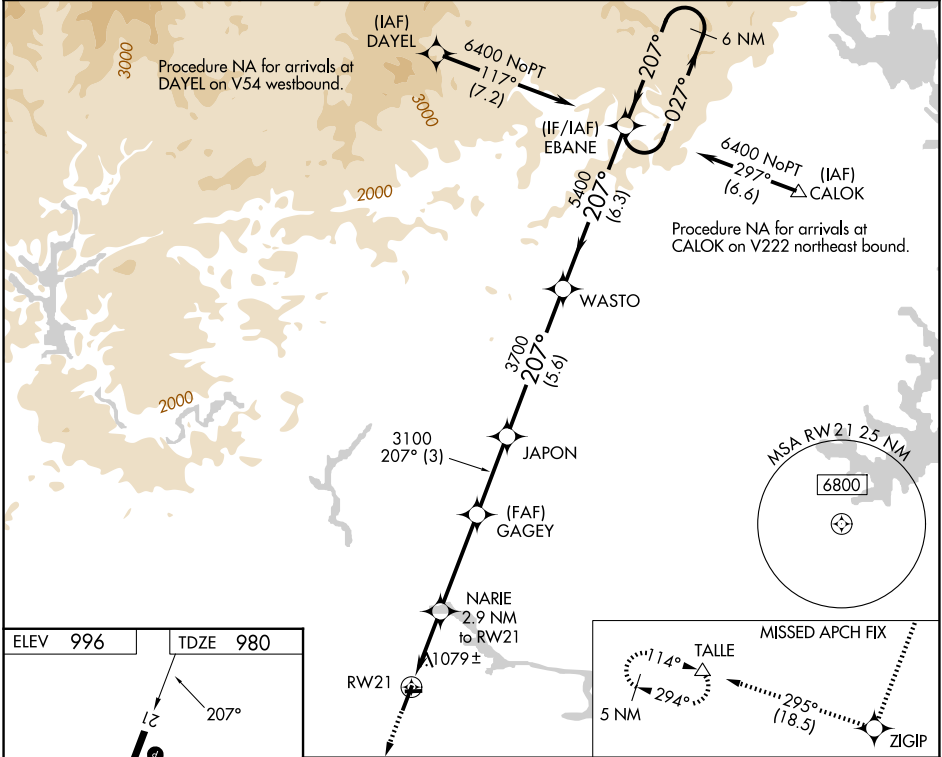

|                 |                      |             |                         |                         |                      |
|-----------------|----------------------|-------------|-------------------------|-------------------------|----------------------|
| 5800            | ZIGIP                | TALLE       | * LNAV only             | EBANE                   | 6 NM Holding Pattern |
| ↑               | tr 295°              | △           |                         |                         |                      |
| *1.8 NM to RW21 | NARIE 2.9 NM to RW21 | GAGEY 3100  | JAPON                   | WASTO                   | EBANE                |
| RW21            | *1920                | 3100        | 3700                    | 5400                    | 6400                 |
| 1.8             | 1.1 NM               | 3.7 NM      | 3 NM                    | 5.6 NM                  | 6.3 NM               |
| CATEGORY        | A                    | B           | C                       | D                       |                      |
| LPV DA          | 1230-1 250 (300-1)   |             |                         |                         |                      |
| LNAV/VNAV DA    | 1395-1½ 415 (400-1½) |             |                         |                         |                      |
| LNAV MDA        | 1560-1               | 580 (600-1) | 1560-1½                 | 580 (600-1½)            |                      |
| CIRCLING        | 1720-1               | 724 (800-1) | 1760-2¼<br>764 (800-2¼) | 2480-3<br>1484 (1500-3) |                      |