

APP CRS
107°

Rwy Ldg
TDZE
413

Apt Elev
413

RNAV (GPS) RWY 12R

ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS

When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase LNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.

MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.


ATIS
121.45

ST LOUIS APP CON
123.7 371.875

DOWNTOWN TOWER ★
119.925 (CTAF) 0 379.3

GND CON
121.8

UNICOM
122.95

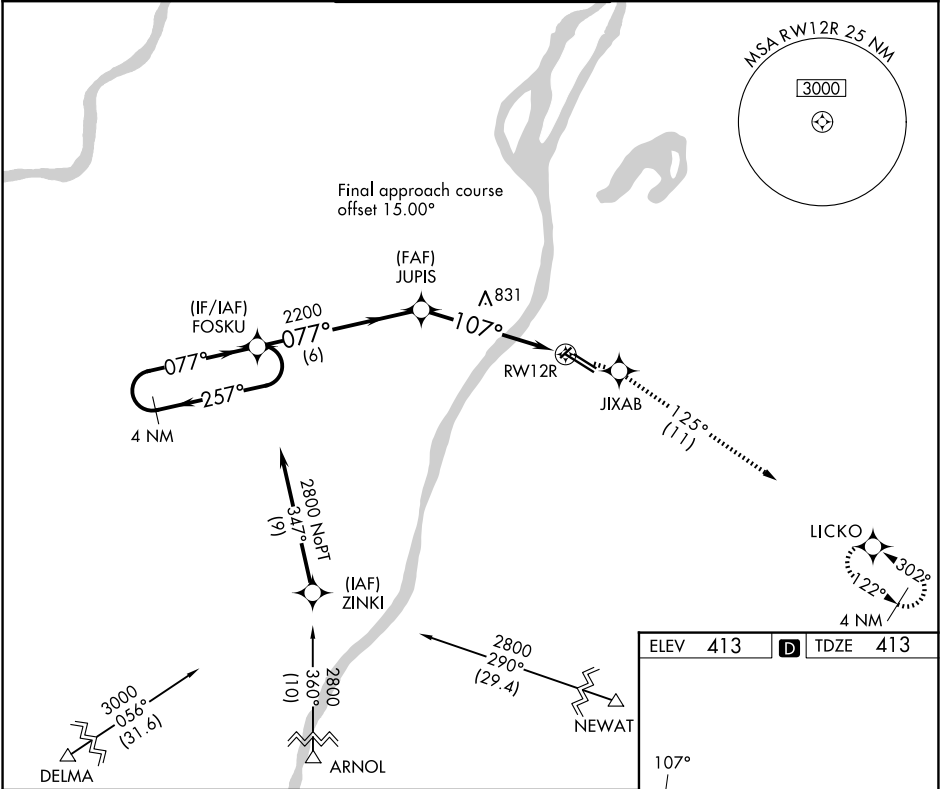

4 NM Holding Pattern

FOSKU

2800

←257°

077°→

VDP NA when using St Louis Lambert Intl altimeter setting.

6 NM

3.3 NM

2.1 NM

2200

JUPIS

107°

3.03°

TCH 50

2.1 NM to RW12R

RW12R

LICKO

2789 175

125

5301 X 75

7002 X 150

300

107°

TWR

CATEGORY	A	B	C	D
LNAV MDA	1140-1 727 (800-1)	1140-2 727 (800-2)	1140-2¼ 727 (800-2¼)	1140-2¼ 727 (800-2¼)
CIRCLING	1140-1 727 (800-1)	1240-2½ 827 (900-2½)	1380-3 967 (1000-3)	

HIRL Rwy 12R-30L

REIL Rwys 12L and 12R

REIL Rwy 30R

MIRL Rwys 5-23 and 12L-30R