

APP CRS
302°

Rwy Ldg
TDZE
Apt Elev

5300
408
413

RNAV (GPS) RWY 30R

ST LOUIS DOWNTOWN (CPS)


▼

⚠

Circling Rwy 5 NA at night. DME/DME RNP-0.3 NA. Rwy 30R helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 80 feet, increase LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climbing left turn to 3000
direct GLASS and hold.

ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------	------------------

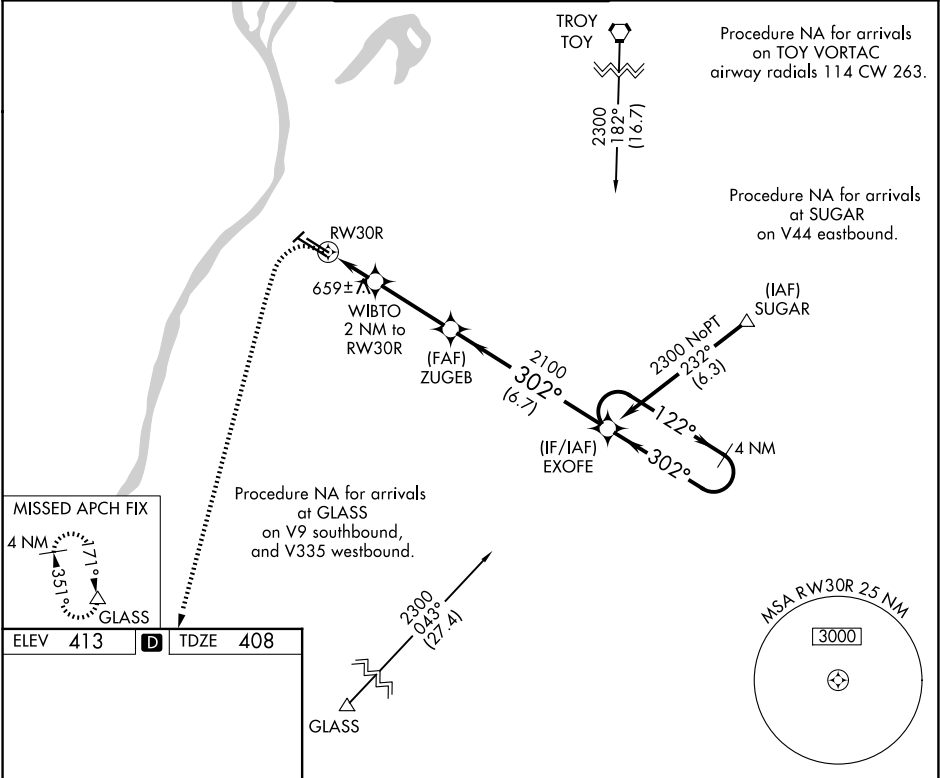

ELEV 413

D

TDZE 408

3000

GLASS

△

WIBTO
2 NM to
RW30R

ZUGEB

2100

302°

3.00°
TCH 40

1080

2 NM

3.2 NM

6.7 NM

EXOFE

4 NM
Holding Pattern

122°

302°

2300

HIRL Rwy 12R-30L
REIL Rwy 12L and 12R
REIL Rwy 30R
MIRL Rwy 5-23 and 12L-30R

CAHOKIA/ST LOUIS, ILLINOIS

Orig-C 25MAR21

CATEGORY	A	B	C	D
LNAV MDA	920-1 512 (600-1)	920-1 512 (600-1)	920-1 512 (600-1)	920-1 512 (600-1)
CIRCLING	920-1 507 (600-1)	1120-1 707 (800-1)	1240-2 827 (900-2)	1380-3 967 (1000-3)

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026