



WAAS CH 58010 W23A	APP CRS 231°	Rwy Ldg 5572 TDZE 471 Apt Elev 480
--	------------------------	---

RNAV (GPS) RWY 23

MOUNT VERNON (MVN)

RNP APCH - GPS. ▼ ▲ Baro-VNAV and VDP NA when using ENL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. Circling Rwy 15, 33 NA at night. When local altimeter setting not received, use ENL altimeter setting and increase LPV DA to 716 feet; increase LNAV/VNAV DA to 985 feet; increase all MDAs 60 feet and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1¾ SM.	MALSR A5	MISSED APPROACH: Climb to 3000 direct GEJTO and hold.
---	--	---

AWOS-3PT 118.2	KANSAS CITY CENTER 127.7 351.825	UNICOM 123.0(CTAF) 0
--------------------------	--	--------------------------------

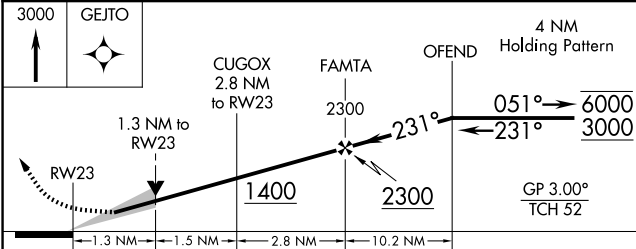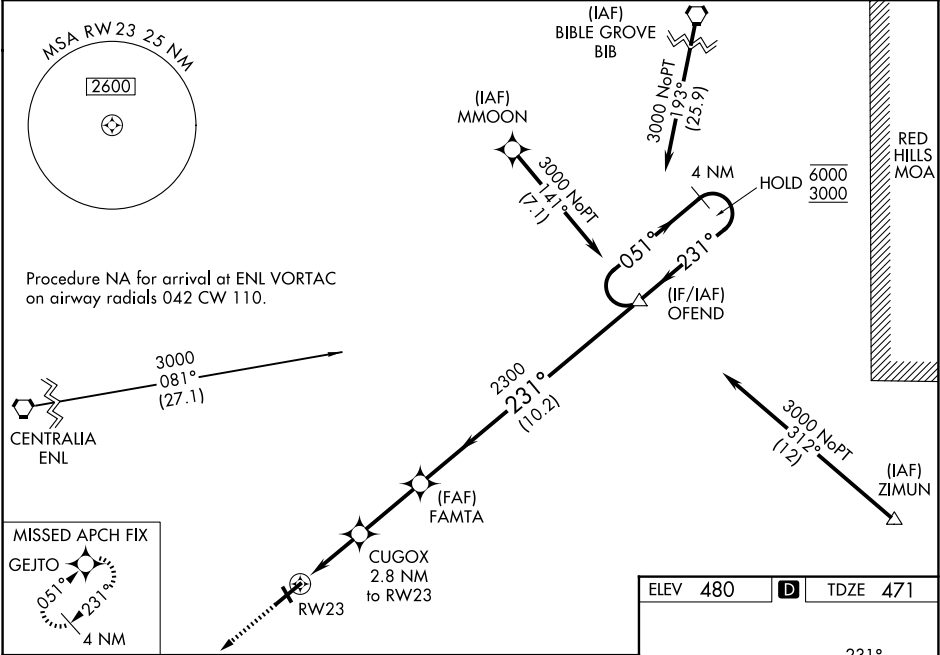

CATEGORY	A	B	C	D
LPV DA	671-½		200 (200-½)	
LNAV/VNAV DA	940-1		469 (500-1)	
LNAV MDA	940-½	469 (500-½)	940-1	469 (500-1)
CIRCLING	980-1 500 (500-1)	1000-1 520 (600-1)	1140-1¾ 660 (700-1¾)	1380-3 900 (900-3)

