


APP CRS	Rwy Ldg	4700
095°	TDZE	740
	Apt Elev	747

RNAV (GPS) RWY 9

DOWAGIAC MUNI (C91)

RNP APCH - GPS.	Rwy 9 helicopter visibility reduction below 1 SM NA. Circling NA to Rwy 4 and 22. Obtain local altimeter setting on CTAF, when not recieved, use EKM altimeter setting and increase all MDAs 60 feet, and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM. Straight-in and Circling Rwy 9 NA at night.	MISSED APPROACH: Climb to 2700 direct YEGTU and hold.
-----------------	--	---

SOUTH BEND APP CON ★ 118.55 257.8	UNICOM 122.8 (CTAF) 0
--------------------------------------	--------------------------

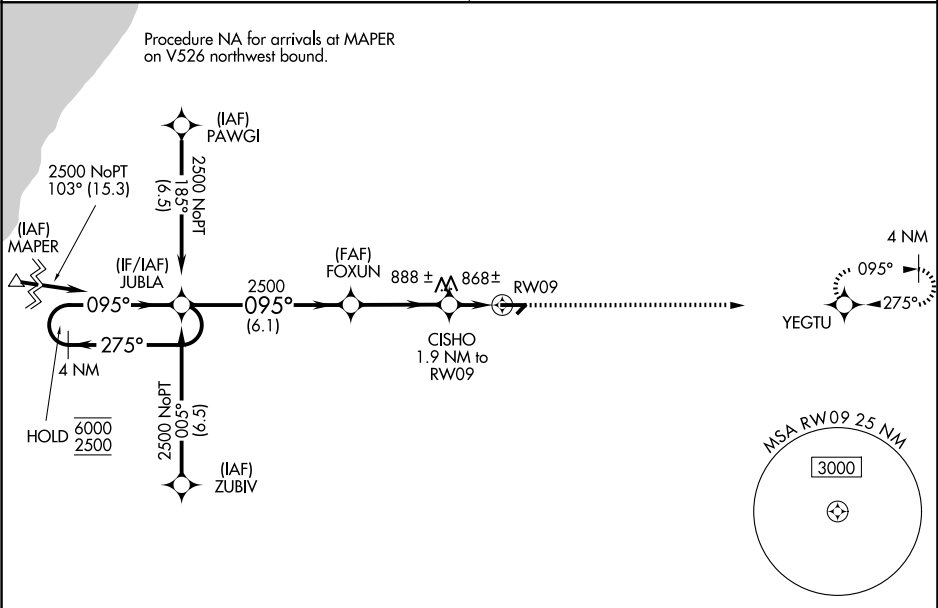

4 NM Holding Pattern 6000 2500 ←275° 095°→ JUBLA FOXUN 2500 095° 3.00° TCH 35 1380 CISHO 1.9 NM to RW09 RW09 6.1 NM 3.5 NM 1.9 NM 2700 ↑ YEGTU					ELEV 747 TDZE 740 4700 X 100 27 095° 217 X 100 27					
CATEGORY	A	B	C	D						
LNAV MDA	1120-1		380 (400-1)							
CIRCLING	1300-1 553 (600-1)	1320-1 573 (600-1)	1320-1½ 573 (600-1½)	1480-2¼ 733 (800-2¼)						
					REIL Rwy 9 and 27 MIRL Rwy 9-27					