


AWOS-3
123.775
CLNC DEL
119.85
CTAF
122.8
CHARLSTON DEP CON
120.7 306.925

TAKEOFF MINIMUMS

- Rwy 4: ATC climb of 500' per NM to 900.
- Rwy 9: ATC climb of 500' per NM to 800.
- Rwy 22: Standard with minimum climb of 245' per NM to 520. ATC climb of 500' per NM to 1300.
- Rwy 27: ATC climb of 500' per NM to 1500.

- NOTE: Transponder code will be issued by Charleston clearance delivery.
- NOTE: If unable to accept climb rate, advise ATC on initial contact.
- NOTE: RNAV 1.
- NOTE: GPS required.

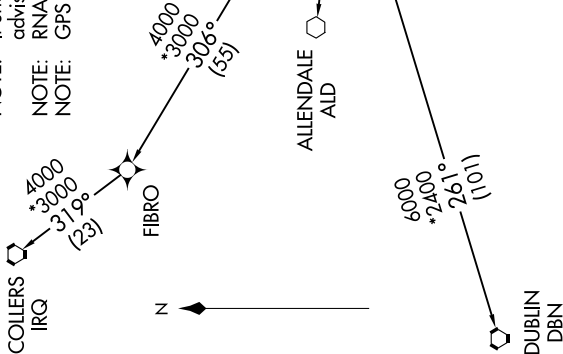

NOTE: Chart not to scale.