


LOC I-DQH 108.7	APP CRS 043°	Rwy Ldg TDZE Apt Elev 6000 253 257
---------------------------	------------------------	--

ILS or LOC RWY 4

DOUGLAS MUNI (DQH)

RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 700 then climbing right turn to 3000 on heading 116° and AYS VORTAC R-320 to WERON/7 DME and hold.
▼ ▲ For inop ALS, increase S-LOC 4 Cat C and D visibility to 1 SM.	AS	

AWOS-3 119.075	JACKSONVILLE CENTER 127.575 269.025	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

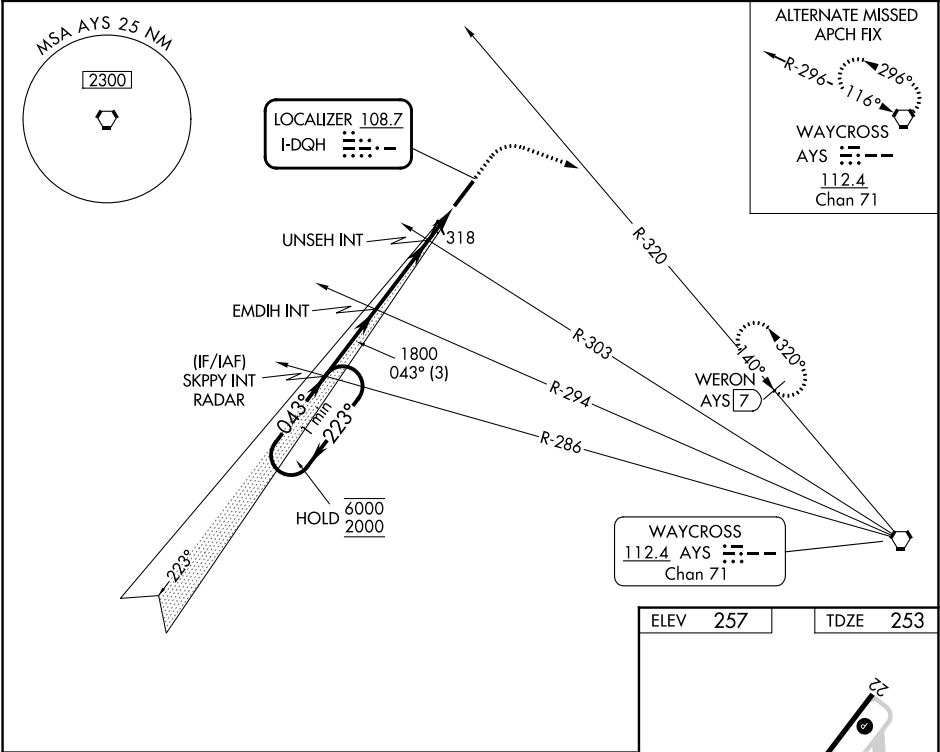

One Minute Holding Pattern	SKPPY INT RADAR	700	3000	AYS R-320	WERON AYS 7
6000 ← 223°	→ 043°	EMDIH INT	UNSEH INT		
2000	1800	800			
GS 3.00°					
TCH 51					
	3 NM	3.1 NM	1.6		
CATEGORY	A	B	C	D	
S-ILS 4		453-½	200 (200-½)		
S-LOC 4	620-½	367 (400-½)	620-⅝	367 (400-⅝)	
CIRCLING	720-1 463 (500-1)	820-1 563 (600-1)	960-2 703 (800-2)	960-2¼ 703 (800-2¼)	
					MIRL Rwy 4-22 0
					FAF to MAP 4.7 NM
					Knots 60 90 120 150 180
					Min:Sec 4:42 3:08 2:21 1:53 1:34