
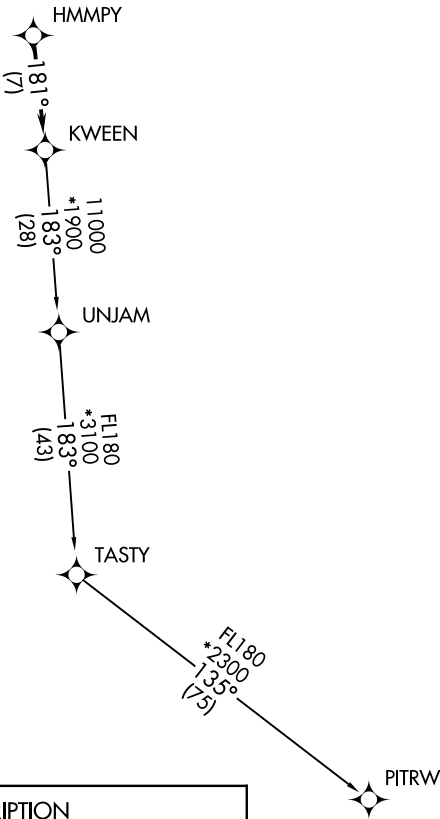


|                                                      |                              |                       |
|------------------------------------------------------|------------------------------|-----------------------|
| CHARLOTTE DEP CON<br>120.05 307.8<br>ASOS<br>120.775 | RNAV 1 - DME/DME/IRU or GPS. | TOP ALTITUDE:<br>3000 |
|                                                      | RADAR required.              |                       |

TAKEOFF MINIMUMS  
Rwys 2, 20: Standard.

- NOTE: Turbojet only.  
NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.  
NOTE: If unable to accept climb rates, advise ATC on initial contact.  
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for vectors to HMMPY, then on depicted route to KWEEN, then on transition. Maintain 3000. Expect filed altitude 10 minutes after departure.

PITRW TRANSITION (KWEEN8.PITRW)  
UNJAM TRANSITION (KWEEN8.UNJAM)

NOTE: Chart not to scale.