


VORTAC EUF 109.2 Chan 29	APP CRS 187°	Rwy Ldg 5000 TDZE 285 Apt Elev 285
--	------------------------	---

VOR RWY 18
WEEDON FLD (EUF)

NA When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Increase AFENY fix minimums S-18 visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	ATLANTA APP CON ★ 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------	---------------------------------

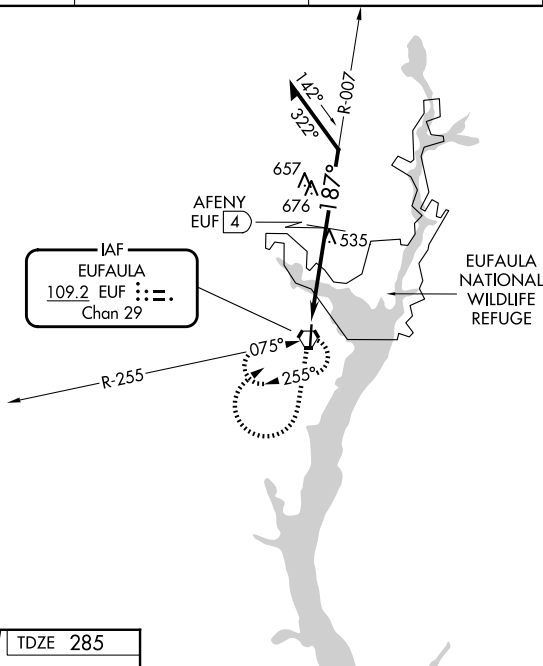

A circular dial for the MSA EUF 25 NM. The dial has a scale from 0 to 360 degrees. Two readings are shown: 2500 at 150 degrees and 3300 at 330 degrees.

*1080 when using Columbus, GA altimeter setting.