ZAAPA SIX DEPARTURE (RNAV)


(ZAAPA6.ZAAPA) 27NOV25

CLEVELAND, OHIO
BURKE LAKEFRONT (BKL)

CLEVELAND DEP CON
125.35 346.325
ATIS
125.25
CLNC DEL
339.8
121.9 (when twr closed)
GND CON
121.9 339.8
LAKEFRONT TOWER✶
124.3 (CTAF) 339.8


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

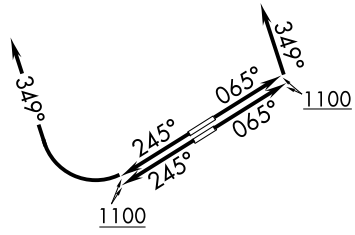

TAKEOFF MINIMUMS:
Rwys 6L, 24R: Standard with minimum climb of 500′ per NM to 1100.
Rwys 6R: Standard with minimum climb of 500′ per NM to 1100. NA when control tower closed.
Rwy 24L: 400-1⅜ or standard with minimum climb of 757′ per NM to 1000. NA when control tower closed.

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.
NOTE: Rwy 6R/24L: Takeoff minimums NA when control tower closed.

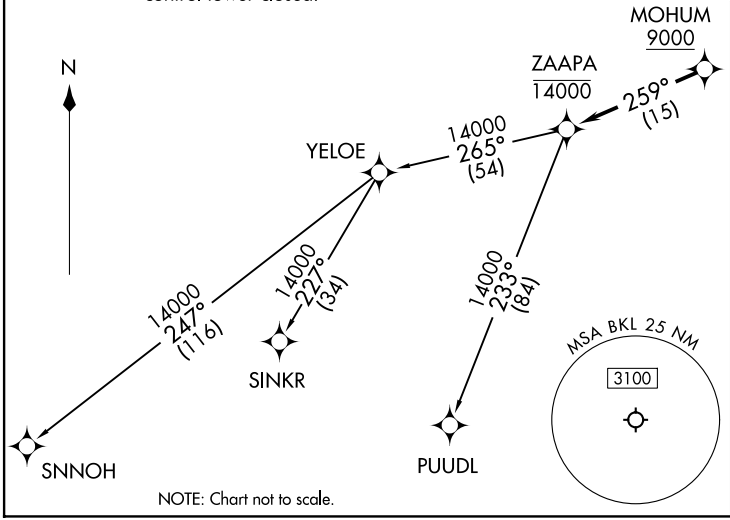

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6L/R: Climb on heading 065° to 1100, then on heading 349° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 24L/R: Climb on heading 245° to 1100, then right turn heading 349° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA6.PUUDL)
SINKR TRANSTIION (ZAAPA6.SINKR)
SNNOH TRANSITION (ZAAPA6.SNNOH)

(ZAAPA6.ZAAPA) 25331
ZAAPA SIX DEPARTURE (RNAV)
AL-5370 (FAA)
BURKE LAKEFRONT (BKL)
CLEVELAND, OHIO