


WAAS CH 99414 W08A	APP CRS 079°	Rwy Ldg TDZE 463 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 8L

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct DBLEE and right turn on track 171° to BNANA and right turn on track 272° to DERDF and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using St Louis Lambert Intl altimeter setting. When local altimeter setting not received, use STL altimeter setting and increase LPV DA to 898 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1118 feet and all visibilities ½ SM. Increase all MDAs 60 feet.	

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 0 257.2	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

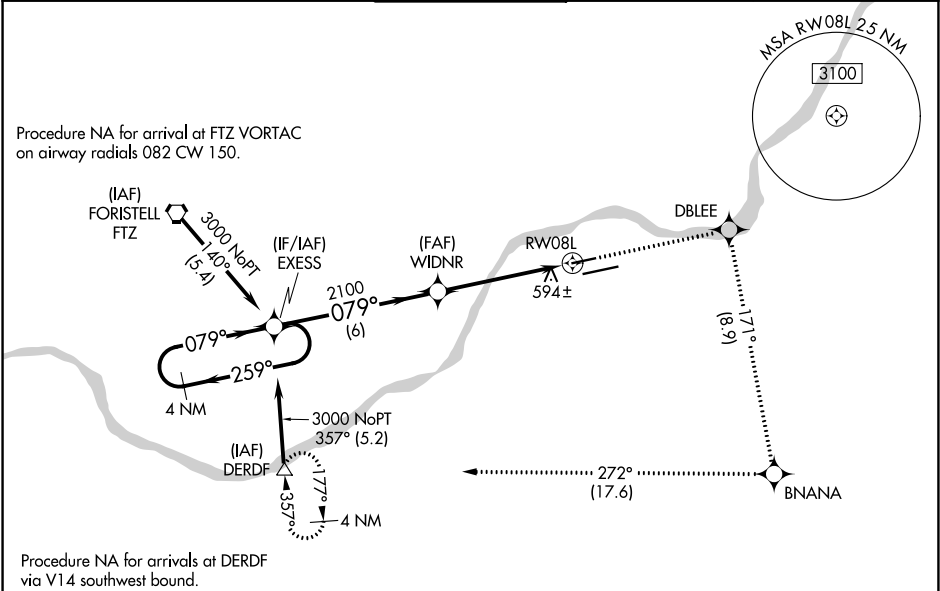

3000 ↑ DBLE ✱ tr 171° ↷ BNANA ✱ tr 272° ↷ DERDF △					ELEV 463	D	TDZE 463
4 NM Holding Pattern EXCESS 3000 ← 259° 079° → GP 3.00° TCH 41 2100 WIDNR 2100 *1.7 NM to RW08L RW08L *LNAV only 079° 5000 X 75 26R TWR 7486 X 150 26L							
CATEGORY	A	B	C	D			
LPV DA	855-1⅓	392 (400-1⅓)	NA				
LNAV/VNAV DA	1075-2½	612 (700-2½)	NA				
LNAV MDA	1040-1	577 (600-1)	NA				
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	NA				
MIRL Rwy 8L-26R 1							
HIRL Rwy 8R-26L 1							