WAAS CH 49228 W05A	APP CRS 050°	Rwy Ldg 3741	TDZE 1041	Apt Elev 1041


RNAV (GPS) RWY 5
MIAMI UNIVERSITY (OXD)


RNP APCH - GPS.

Baro-VNAV NA when using CVG altimeter setting. Rwy 5 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use CVG altimeter setting: increase LPV DA to 1393; increase LNAV/VNAV DA to 1419; increase all MDA 100 feet and visibility LNAV Cat C ⅜ SM.


MISSED APPROACH: Climb to 3000 direct JUSAL and hold.

AWOS-3PT	CINCINNATI APP CON	UNICOM	
118.625	121.0 254.25	122.8 (CTAF)	122.9 (L)

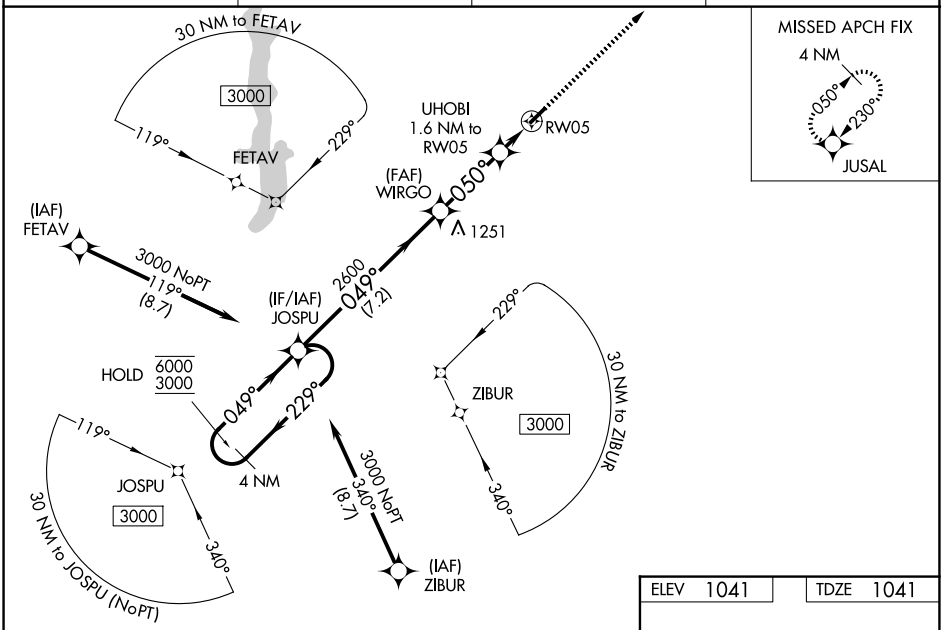

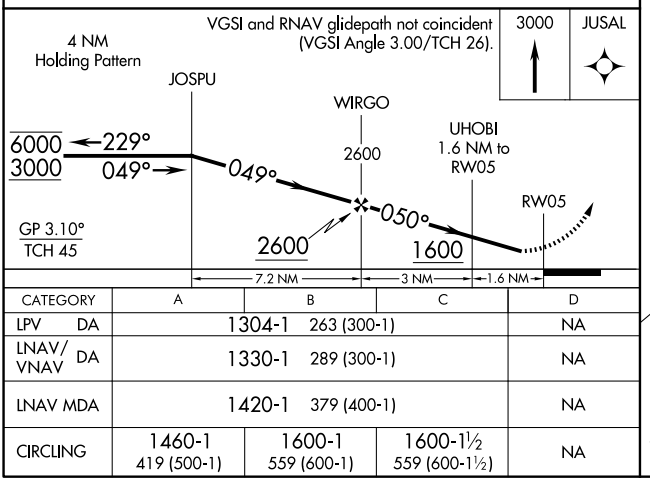

CATEGORY	A	B	C	D
LPV DA	1304-1	263 (300-1)		NA
LNAV/VNAV DA	1330-1	289 (300-1)		NA
LNAV MDA	1420-1	379 (400-1)		NA
CIRCLING	1460-1 419 (500-1)	1600-1 559 (600-1)	1600-1½ 559 (600-1½)	NA

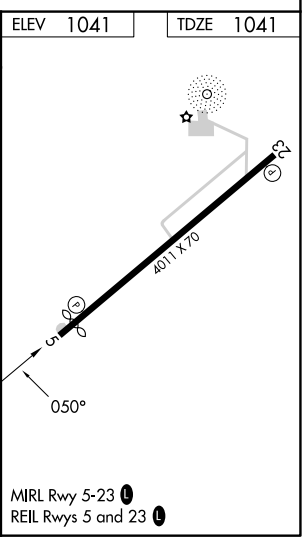

MIRL Rwy 5-23 (L)
REIL Rwys 5 and 23 (L)

EC-2, 01 OCT 2026 to 29 OCT 2026
EC-2, 01 OCT 2026 to 29 OCT 2026