

WAAS
CH **53599**
W36A

APP CRS
002°

Rwy Ldg
TDZE **922**
Apt Elev **922**

RNAV (GPS) RWY 36

INDIANAPOLIS EXEC (TYQ)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct SICL and hold.

AWOS-3PT 120.725	INDIANAPOLIS APP CON 124.65 127.15 317.8	CLNC DEL 118.175	UNICOM 123.05 (CTAF) ①
----------------------------	--	----------------------------	----------------------------------

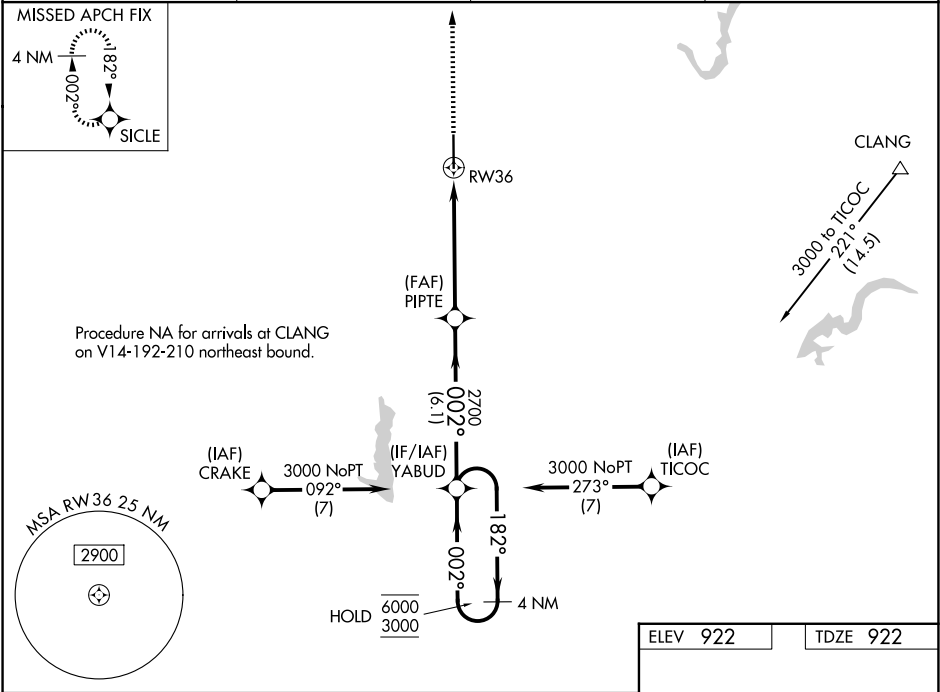

3000

SICL

RW36

1.3 NM to RW36

PIPTE

2700

YABUD

4 NM Holding Pattern

182°

002°

6000

3000

GP 3.00° TCH 53

1.3

4.2 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1172-3 ⁴ / ₄		250 (300-3 ⁴ / ₄)	
LNAV/VNAV DA	1351-1 ¹ / ₄		429 (500-1 ¹ / ₄)	
LNAV MDA	1380-1	458 (500-1)	1380-1 ³ / ₈	458 (500-1 ³ / ₈)
CIRCLING	1400-1	478 (500-1)	1440-1 ¹ / ₂ 518 (600-1 ¹ / ₂)	1480-2 558 (600-2)

HIRL Rwy 18-36 ①

REIL Rwy 18 and 36 ①

81

7001 X 100

36

002°