
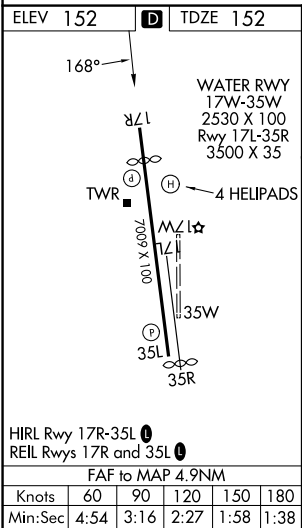


LOC/DME I-HEW	APP CRS	Rwy Ldg	6002
110.5	168°	TDZE	152
Chan 42		Apt Elev	152

LOC RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RADAR required for procedure entry.		MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.
▼ ▲ NA	When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cts C/D visibility ½ mile. Circling NA to Rwy 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.	

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 (E) 118.4 (CTAF) 354.1 (W)	GND CON 121.8 239.0	UNICOM 122.95
-----------------	--------------------------------	---	------------------------	------------------

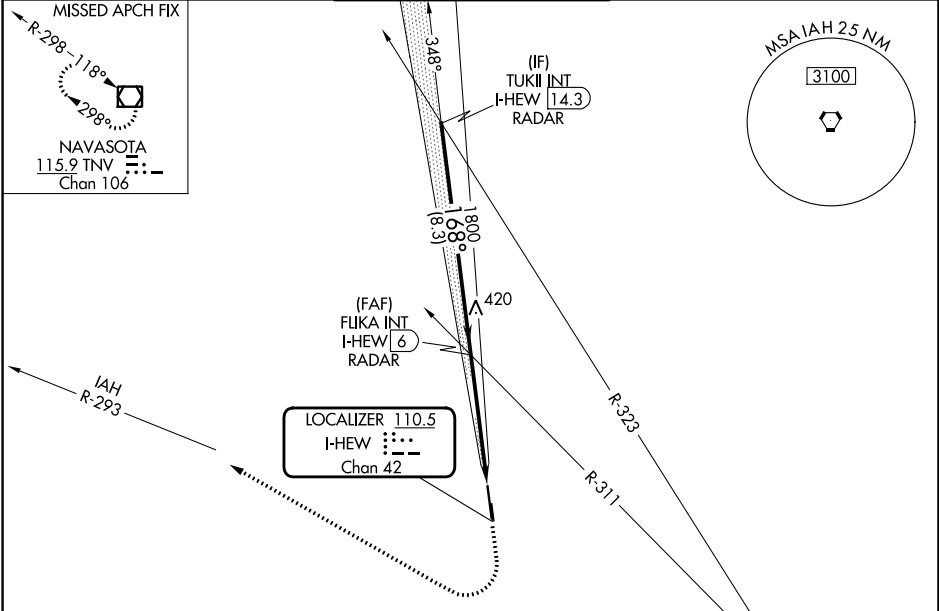

Visual Segment - Obstacles.		1200	2000	IAH R-293	TNV
		↑	hdg 325°		
		2000	1800	I-HEW 1.1	
		8.3 NM	4.9 NM		
CATEGORY	A	B	C	D	
S-LOC 17R	640-1	488 (500-1)	640-1½	488 (500-1½)	
CIRCLING	640-1	660-1	680-1½	780-2	
	488 (500-1)	508 (600-1)	528 (600-1½)	628 (700-2)	