


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 8605 |
| 168°    | TDZE     | 27   |
|         | Apt Elev | 27   |

RNAV (RNP) Z RWY 17L

SACRAMENTO INTL (SMF)

|                                                                                                                                                                                                 |       |                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNP AR APCH-GPS.                                                                                                                                                                                | MALSR | MISSED APPROACH: Climb to 500 then right turn to 3000 direct GRIME and hold.<br>*Missed approach requires minimum climb of 290 feet per NM to 3000.<br>#Missed approach requires minimum climb of 300 feet per NM to 3000. |
| For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 4000; increase RNP 0.30 all Cats visibility to RVR 4500. |       |                                                                                                                                                                                                                            |

|        |                                                         |               |             |
|--------|---------------------------------------------------------|---------------|-------------|
| D-ATIS | NORCAL APP CON                                          | CAPITOL TOWER | GND CON     |
| 126.75 | 125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE) | 125.7 256.7   | 121.7 256.7 |

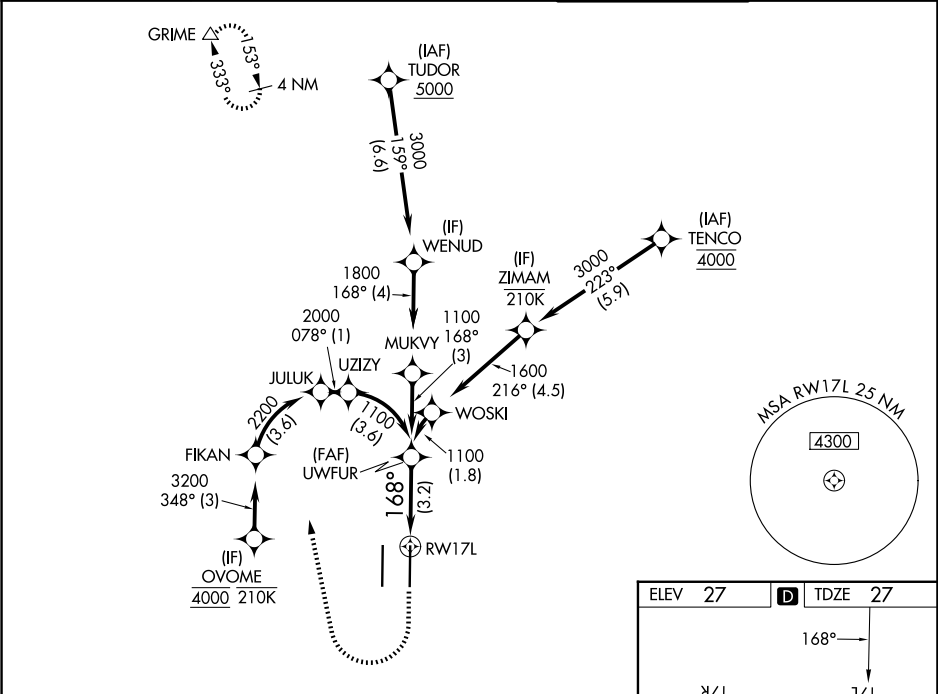

|                        |                    |       |                                                                     |   |
|------------------------|--------------------|-------|---------------------------------------------------------------------|---|
| 500                    | 3000               | GRIME | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 64). |   |
|                        |                    |       |                                                                     |   |
|                        |                    |       | UWFUR<br>1100<br><br>1100<br><br>GP 3.00°<br>TCH 55                 |   |
| CATEGORY               | A                  | B     | C                                                                   | D |
| RNP 0.12 DA#           | 277/24 250 (300-½) |       |                                                                     |   |
| RNP 0.30 DA*           | 339/24 312 (400-½) |       |                                                                     |   |
| AUTHORIZATION REQUIRED |                    |       |                                                                     |   |

