WAAS CH 93513 W01A	APP CRS 010°	Rwy Idg 6604 TDZE 87 Apt Elev 91


RNAV (GPS) RWY 1


H L SONNY CALLAHAN (CQF)

Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 329 feet, LNAV/VNAV DA to 517 feet, and all MDA 60 feet; increase LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D 1/4 SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct BFM VORTAC and hold.


AWOS-3PT	MOBILE APP CON ★	UNICOM
118.425	118.5 269.3	123.0 (CTAF) L

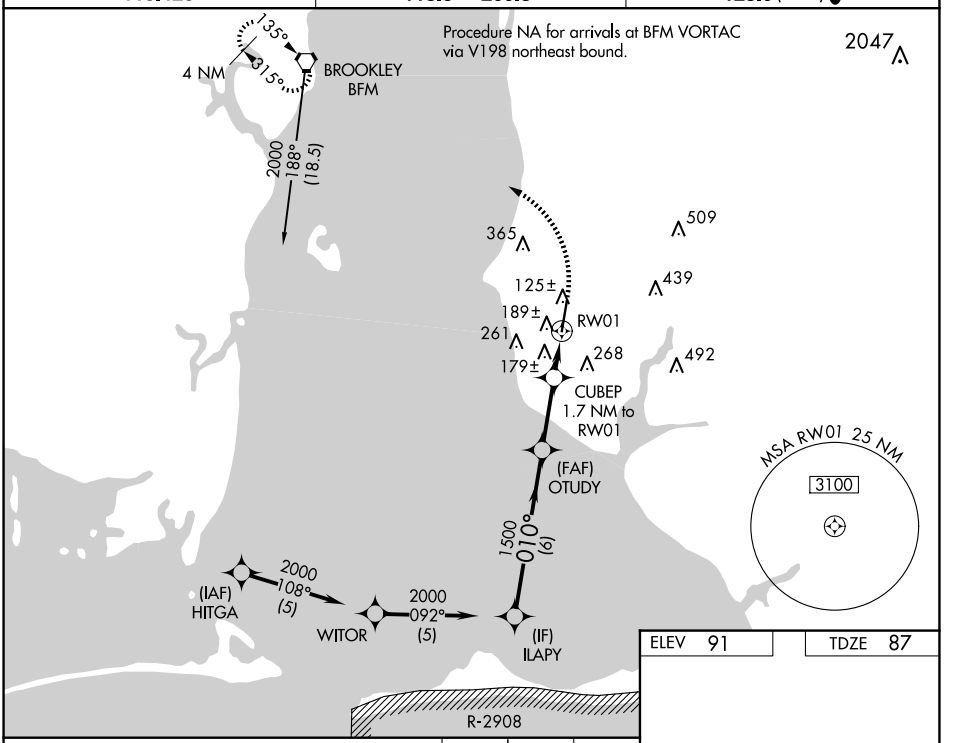

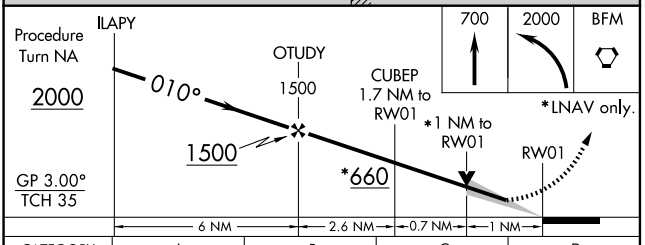

CATEGORY	A	B	C	D
LPV DA	287-¾	200 (200-¾)		
LNAV/VNAV DA	475-1⅜	388 (400-1⅜)		
LNAV MDA	440-1	353 (400-1)		
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-1¾ 629 (700-1¾)	740-2 649 (700-2)

ELEV 91 TDZE 87

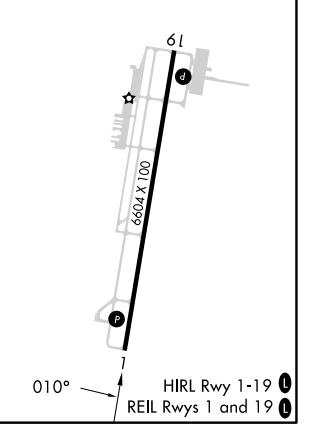

SE-4, 01 OCT 2026 to 29 OCT 2026
SE-4, 01 OCT 2026 to 29 OCT 2026