WAAS	APP CRS	Rwy Ldg 5100
CH 82117	339°	TDZE 788
W34A		Apt Elev 789

RNAV (GPS) RWY 34


CARROLL COUNTY RGNL/JACK B POAGE FLD (DMW)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use FDK altimeter setting: increase LPV DA to 1106 feet; increase LNAV/VNAV DA to 1223 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¼ SM and Circling visibility Cat C ½ SM. Baro-VNAV and VDP NA when using FDK altimeter setting.

MISSED APPROACH: Climb to 3000 direct UNYTS and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
121.25	125.525 291.625	121.725	122.7 (CTAF) L

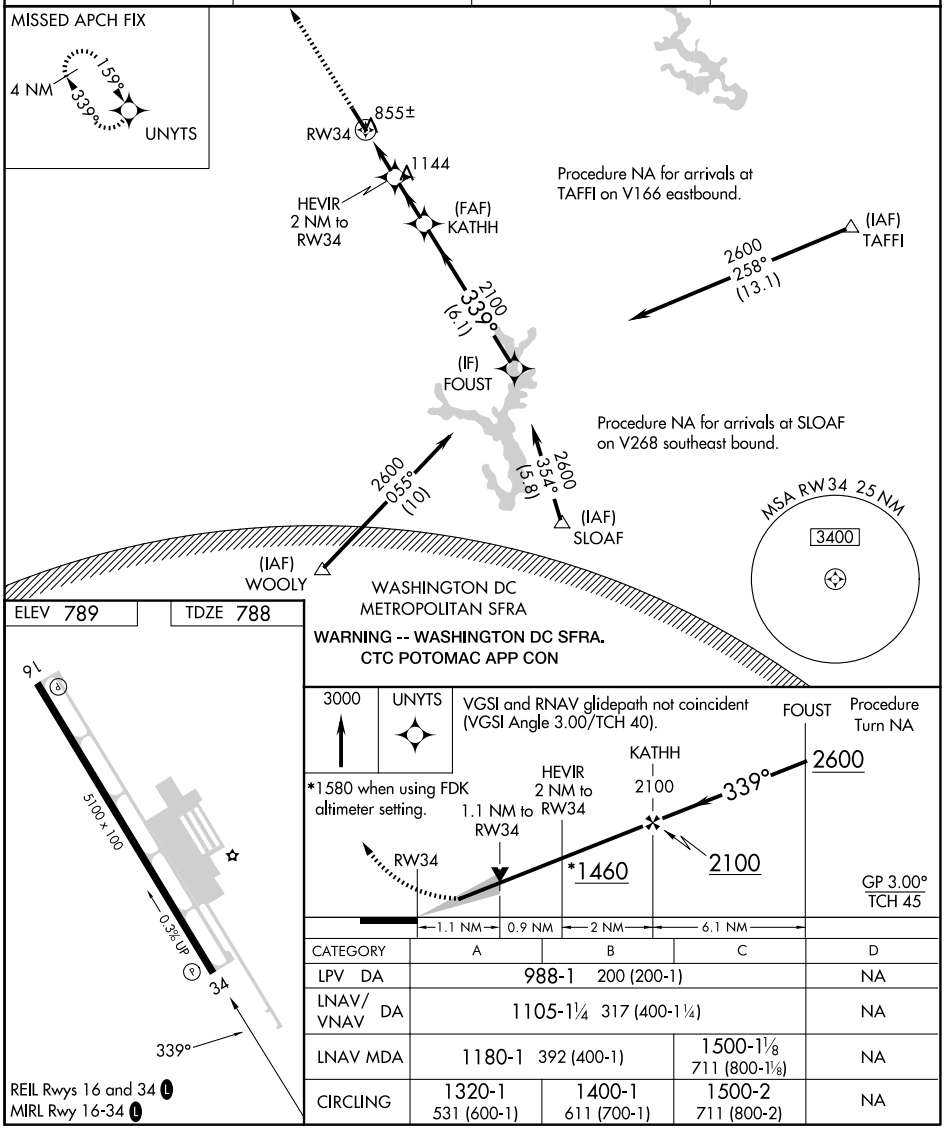

CATEGORY	A	B	C	D
LPV DA	988-1 200 (200-1)			NA
LNAV/VNAV DA	1105-1¼ 317 (400-1¼)			NA
LNAV MDA	1180-1 392 (400-1)		1500-1⅛ 711 (800-1⅛)	NA
CIRCLING	1320-1 531 (600-1)	1400-1 611 (700-1)	1500-2 711 (800-2)	NA

NE-3, 01 OCT 2026 to 29 OCT 2026
NE-3, 01 OCT 2026 to 29 OCT 2026