


LOC I-PEK	APP CRS	Rwy Ldg
110.3	257°	10000
	TDZE	27
	Apt Elev	30

ILS Y or LOC Y RWY 26


JACKSONVILLE INTL (JAX)

ADF required. RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.
For inop ALS, ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.		

D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON
125.85	119.0 269.9	118.3 317.7	121.9 348.6

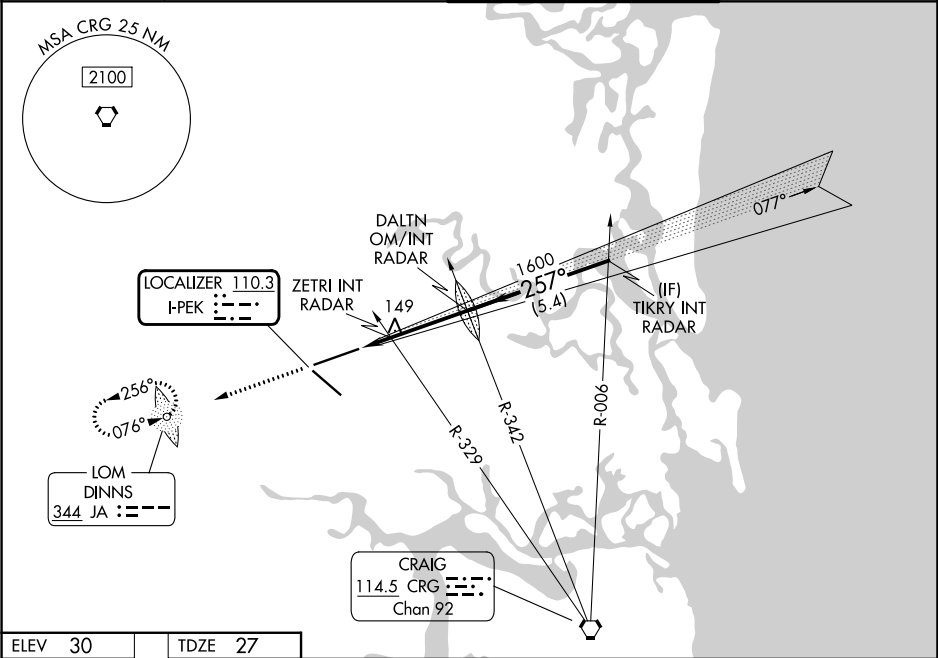

ELEV 30	TDZE 27
REIL Rwy 32 TDZL/RCLS Rwy 8, 14, and 26 HIRL Rwy 8-26 and 14-32	
FAF to MAP 4.2 NM	
Knots	60 90 120 150 180
Min:Sec	4:12 2:48 2:06 1:41 1:24

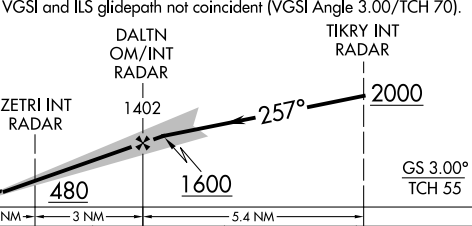3000	DINNS	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).			
					
CATEGORY		A	B	C	D
S-ILS 26		227/18 200 (200-½)			
S-LOC 26		480/24 453 (500-½)		480/45 453 (500-¾)	
CIRCLING		520-1 490 (500-1)		580-1½ 550 (600-1½) 580-2 550 (600-2)	
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 26		400/24 373 (400-½)		400/35 373 (400-¾)	
CIRCLING		520-1 490 (500-1)		580-1½ 550 (600-1½) 580-2 550 (600-2)	