


APP CRS	Rwy Ldg	7701
137°	TDZE	27
	Apt Elev	29

RNAV (RNP) Y RWY 14
JACKSONVILLE INTL (JAX)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct YEJWO and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. GPS required. For inop MALSR, increase RNP 0.30 all Cats visibility to 1½ mile.		

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6
------------------	-------------------------------------	-----------------------------------	------------------------

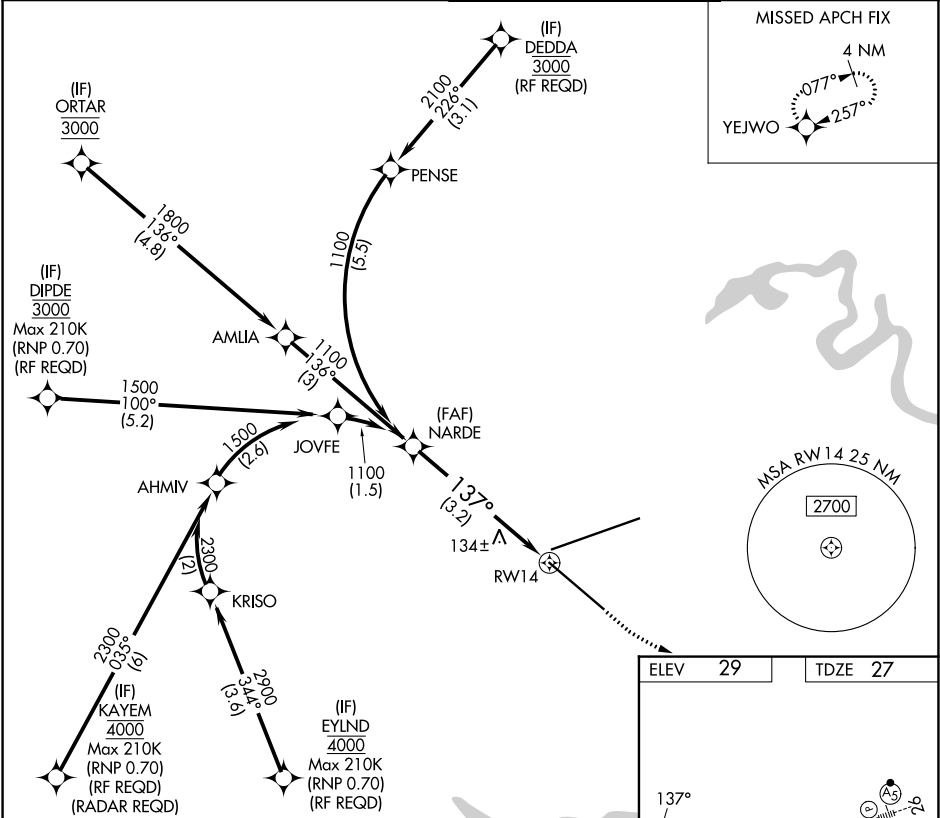

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70).		500	2000	YEJWO
NARDE		1100		
1100		137°		
GP 3.00° TCH 54				
See planview for multiple IF locations.				
3.2 NM				
CATEGORY	A	B	C	D
RNP 0.30 DA	389-1	362 (400-1)		
AUTHORIZATION REQUIRED				
REIL Rwy 32 TDZL/RCLS Rwy 8, 14, and 26 HIRL Rwy 8-26 and 14-32				