

WAAS CH 56213 W24A	APP CRS 244°	Rwy Ldg TDZE Apt Elev	5130 817 823
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

MEXICO MEML (MYJ)

NA


Helicopter visibility reduction below ¾ SM NA. Inoperative table does not apply.
DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Columbia Rgnl altimeter setting; increase LPV DA to 1200 feet; increase LNAV/VNAV DA to 1352 feet; increase all MDAs 80 feet and Circling visibility Cat C ½ SM. Baro-VNAV NA when using Columbia Rgnl altimeter setting.

MALS

MISSED APPROACH:

Climb to 3000 direct TABCO and hold.

AWOS-3PT 120.575	MIZZU APP CON 124.375	CTAF 122.9
----------------------------	---------------------------------	----------------------

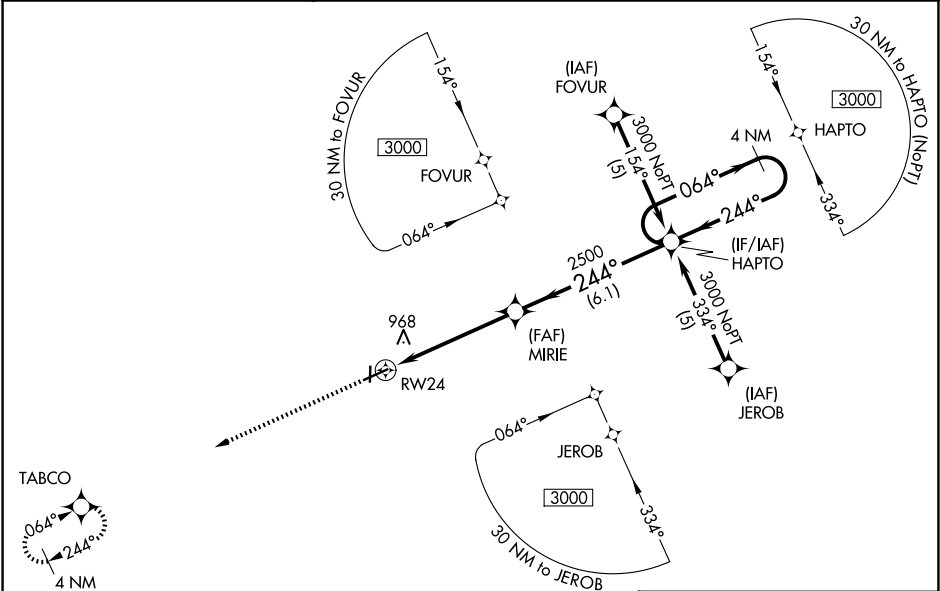

3000

TABCO

MIRIE

HAPTO

4 NM Holding Pattern

GP 3.00° TCH 40

CATEGORY

A

B

C

D

LPV DA

1126-1

309 (400-1)

NA

LNAV/VNAV DA

1278-1¾

461 (500-1¾)

NA

LNAV MDA

1220-1

403 (400-1)

1220-1¼

403 (400-1¼)

NA

CIRCLING

1280-1

457 (500-1)

1420-1½

597 (600-1½)

NA

81

3200 X 50

5501 X 100

36

244°

0.3% UP

0.4%

REIL Rwy 18

MRL Rwy 6-24 and 18-36