


APP CRS	Rwy Ldg	5001
108°	TDZE	790
	Apt Elev	790

RNAV (GPS) RWY 11

FULTON COUNTY (R/C/R)

RNP APCH - GPS.	Helicopter visibility reduction below ¾ SM NA. VDP NA when using GSH altimeter setting. When local altimeter setting not received, use GSH altimeter setting: increase all MDA 100 feet and LNAV visibility Cts C/D and Circling Cts C/D ¼ SM.	MISSED APPROACH: Climb to 3000 direct LOWTO and hold.
-----------------	--	---

AWOS-3 118.775	SOUTH BEND APP CON ★ 132.05 257.8	UNICOM 122.7 (CTAF) 0
-------------------	--------------------------------------	--------------------------

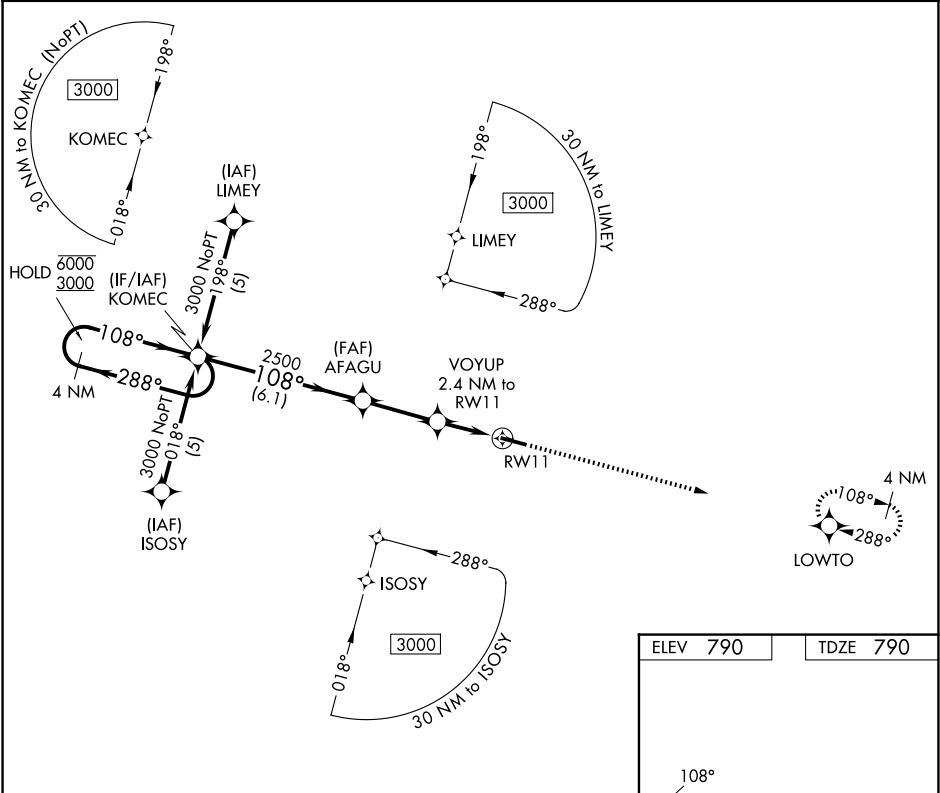

4 NM Holding Pattern		Visual Segment - Obstacles.		3000	LOWTO
CATEGORY	A	B	C	D	
LNAV MDA	1220-1	430 (500-1)	1220-1¼ 430 (500-1¼)	1220-1½ 430 (500-1½)	
CIRCLING	1300-1 510 (600-1)	1380-1 590 (600-1)	1480-2 690 (700-2)	1620-2¾ 830 (900-2¾)	

REIL Rwy 11 and 29 0

MIRL Rwy 11-29 0

EC-2, 01 OCT 2026 to 29 OCT 2026

EC-2, 01 OCT 2026 to 29 OCT 2026