


WAAS CH 69527 W01A	APP CRS 007°	Rwy Ldg TDZE 2694 Apt Elev 2694
--	------------------------	---

RNAV (GPS) RWY 1
TWIN COUNTY (HLX)

RNP APCH - GPS. ▼ Baro-VNAV NA when using PSK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. VDP NA with PSK altimeter setting. When local altimeter setting not received, use PSK altimeter setting: increase LPV DA to 3103 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3154 feet and all visibilities ½ SM; increase all MDAs 140 feet and LNAV visibility Cats C and D ½ SM and Circling Cat C ¼ SM.	MISSED APPROACH: Climb to 3200 then climbing right turn to 5100 direct DOILY and hold, continue climb-in-hold to 5100.
--	--

AWOS-3 118.375	ROANOKE APP CON 126.0 339.8	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

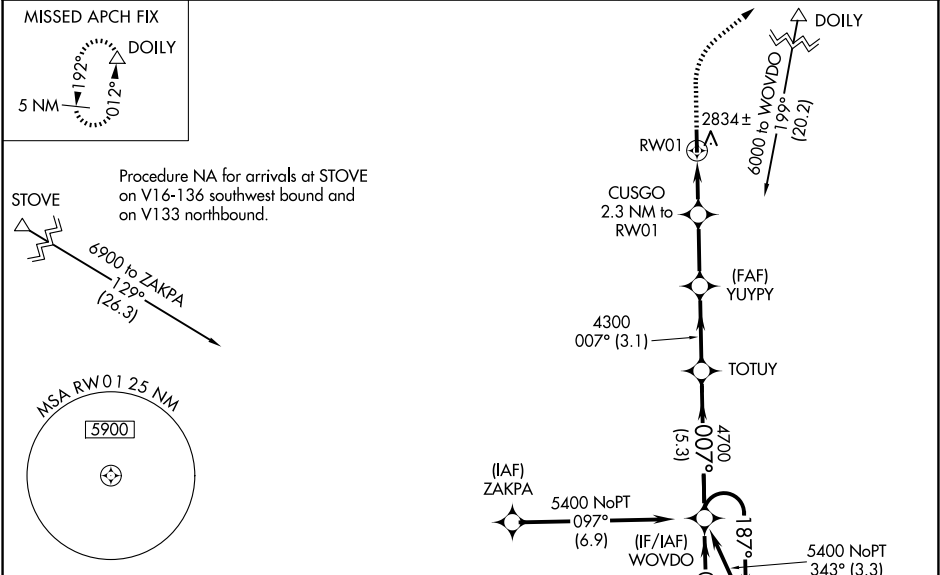

ELEV 2694	TDZE 2694
-----------	-----------

