


WAAS CH 77713 W06A	APP CRS 061°	Rwy Ldg TDZE Apt Elev	4000 786 786
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6

SENECA COUNTY (16G)

RNP APCH.			MISSED APPROACH: Climb to 2400 direct VOBRY and hold.
▼ ▲ NA Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats ¼ SM and LNAV and Circling Cat C visibility ¼ SM.			
AWOS-3PT 127.175	FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 123.0 (CTAF) 0

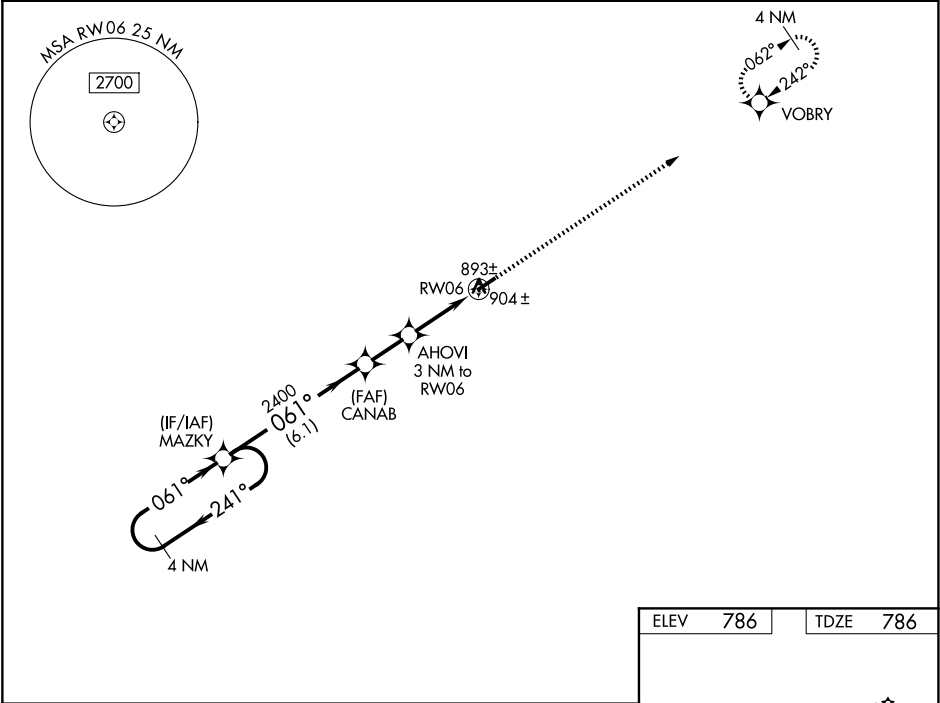

4 NM Holding Pattern		2400 VOBRY	
MAZKY		CANAB	
2400 ← 241° 061° →		2400	
GP 3.00° TCH 38		*1780	
6.1 NM		1.9 NM	
3 NM		RW06	
CATEGORY	A	B	C
LPV DA	1137-1¼	351 (400-1¼)	NA
LNAV/VNAV DA	1174-1½	388 (400-1½)	NA
LNAV MDA	1160-1	374 (400-1)	NA
CIRCLING	1280-1	494 (500-1)	1340-1½ 554 (600-1½)

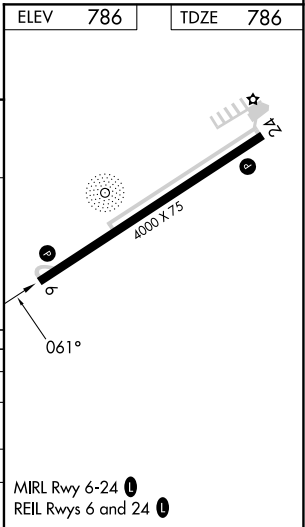

EC-2, 01 OCT 2026 to 29 OCT 2026

EC-2, 01 OCT 2026 to 29 OCT 2026