


ILS or LOC RWY 36
NACOGDOCHES A L MANGHAM JR RGNL (OCH)

A NA VDP NA when using LFK altimeter setting. Autopilot coupled approach NA below 740. When local altimeter setting not received, use LFK altimeter setting: Increase S-ILS 36 DA to 598 feet; increase all MDAs 60 feet and S-LOC 36 visibility Cat C ½ SM, and Circling visibility Cat C ½ SM. Localizer unusable inside 0.3 NM from threshold.



MISSED APPROACH: Climb to 1000 then climbing right turn to 2400 direct LFK VORTAC and hold.

UNICOM
123.0 (CTAF)

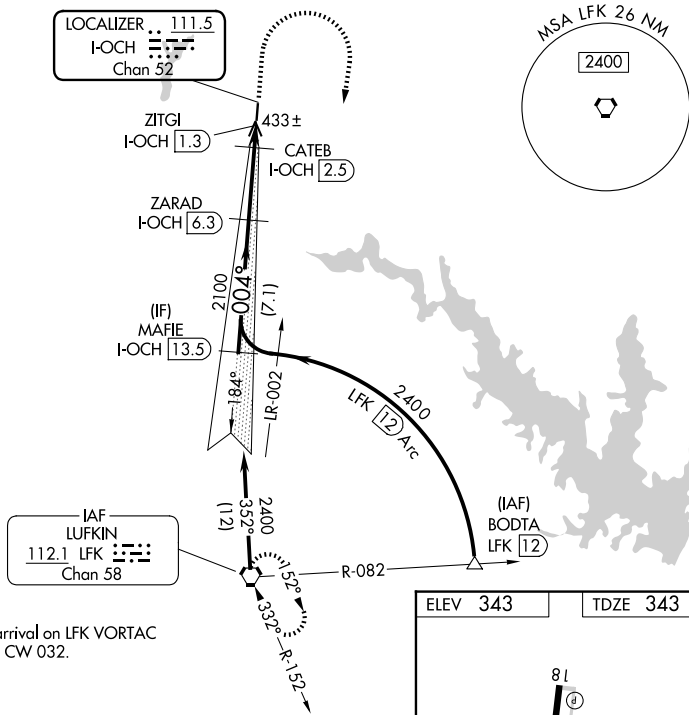

Procedure NA for arrival on LFK VORTAC
airway radials 318 CW 032.

