

WAAS CH 93816 W31A	APP CRS 308°	Rwy Ldg TDZE 879 Apt Elev 887
--	------------------------	---

RNAV (GPS) RWY 31
WEST BEND MUNI (E/TB)


RNP APCH - GPS.

▼ Baro-VNAV NA when using MWC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Rwy 31 helicopter visibility reduction below ¾ SM NA.

▲ When local altimeter setting not received, use MWC altimeter setting: increase LPV DA to 1241 feet; increase LNAV/VNAV DA to 1548 feet; increase all MDAs 80 feet and LNAV visibility Cat C ½ SM and Circling visibility Cat C/D ¼ SM. Circling Rwy 6 NA at night.

MISSED APPROACH: Climb to 3000 direct JESIB and hold.

AWOS-3 120.0	MILWAUKEE APP CON 125.35 307.0	CLNC DEL 124.75	UNICOM 123.05 (CTAF)
------------------------	--	---------------------------	--------------------------------

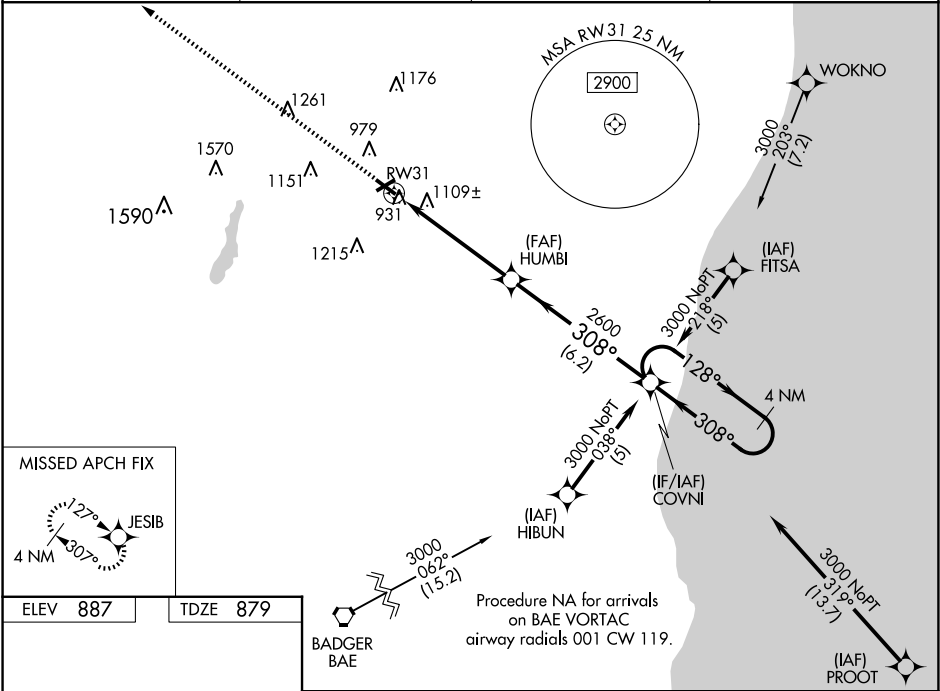

REIL Rwy 13 and 31
MIRL Rwy 6-24 and 13-31

3000 JESIB COVNI 4 NM Holding Pattern 128° → 3000 ← 308° GP 3.00° TCH 45° HUMBI 2600 RW31 5.2 NM 6.2 NM				
CATEGORY	A	B	C	D
LPV DA	1175-1 296 (300-1)			
LNAV/VNAV DA	1482-2 603 (600-2)			
LNAV MDA	1420-1 541 (600-1)	1420-1½ 541 (600-1½)	1420-1¾ 541 (600-1¾)	
CIRCLING	1420-1 533 (600-1)	1520-1 633 (700-1)	1560-2 673 (700-2)	1560-2¼ 673 (700-2¼)

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026