


LOC/DME I-ASN	APP CRS	Rwy Ldg
109.95	038°	6032
Chan 36(Y)		TDZE 511
		Apt Elev 529

ILS Y or LOC Y RWY 4

TALLADEGA MUNI (ASN)

RNA RNAV 1-GPS required. VDP NA with Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase DA to 746 feet and all MDA 40 feet; increase S-LOC 4 Cats C and D visibility 1/8 SM and Circling Cat C visibility 1/4 SM.	MISSED APPROACH: Climb to 1300 then climbing left turn to 3700 direct JOTAV and hold.	
AWOS-3PT 118.425	BIRMINGHAM APP CON 132.15 285.45	UNICOM 122.8 (CTAF) 0

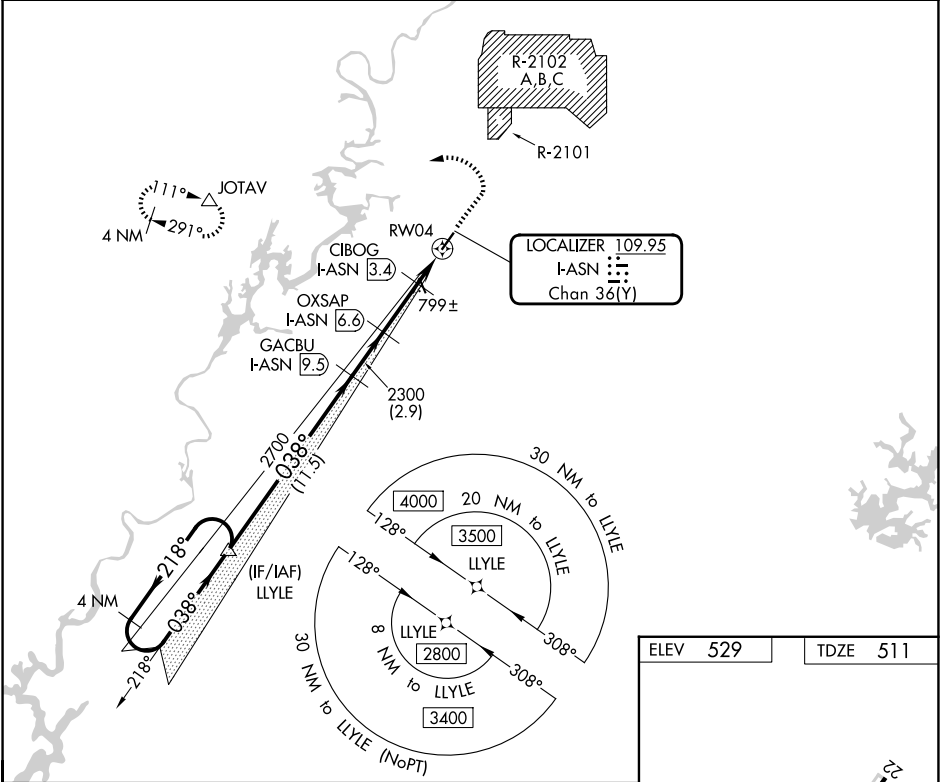

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 65).				
4 NM Holding Pattern	LLYLE	GACBU I-ASN 9.5	OXSAP I-ASN 6.6	CIBOG I-ASN 3.4
2800	218°	038°	2300	1300 3700 JOTAV
GS 3.00° TCH 45	038°	2700	*1280	*LOC only.
11.5 NM	2.9	3.2 NM	0.8	1.5 NM
CATEGORY	A	B	C	D
S-ILS 4	711-3/4 200 (200-3/4)			
S-LOC 4	1060-1	549 (600-1)	1060-1 3/8	549 (600-1 1/8)
CIRCLING	1140-1	1180-1	1380-2 1/2	1500-3
	611 (700-1)	651 (700-1)	851 (900-2 1/2)	971 (1000-3)

