


WAAS CH 58220 W26A	APP CRS 257°	Rwy Ldg 7629 TDZE 1260 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 26
CENTRAL WISCONSIN (CWA)

RNP APCH - GPS.		V A For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C.		MISSED APPROACH: Climb to 3000 direct PLEAD and hold.	
ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7			CWA TOWER ★ 119.75 (CTAF) 0 360.7	GND CON 121.9 360.7

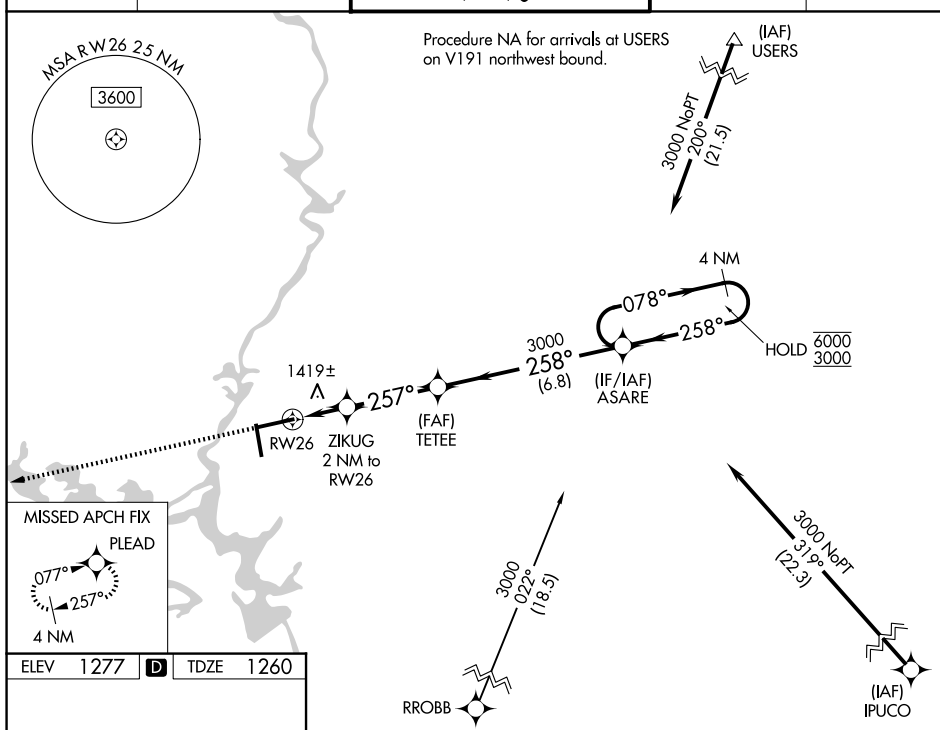

ZIKUG VORTAC

CATEGORY	A	B	C	D
LPV DA	1460- $\frac{3}{4}$		200 (200- $\frac{3}{4}$)	
LNAV/VNAV DA	1680-1 $\frac{1}{8}$		420 (500-1 $\frac{1}{8}$)	
LNAV MDA	1680-1	420 (500-1)	1680-1 $\frac{1}{8}$	420 (500-1 $\frac{1}{8}$)
CIRCLING	1740-1	463 (500-1)	1740-1 $\frac{1}{2}$ 463 (500-1 $\frac{1}{2}$)	1840-2 563 (600-2)