WAAS	APP CRS	Rwy Idg	6200
CH 45618	113°	TDZE	2976
W11A		Apt Elev	3004

RNAV (GPS) RWY 11


ODESSA-SCHLEMEYER FLD (ODO)


Circling to Rwy 16 and 20 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling NA S of Rwys 2 and 34. When local altimeter setting not received use Midland Intl Air and Space Port altimeter setting and increase all DA 41 feet and all MDA 60 feet and increase LNAV/VNAV all Cats visibility ⅛ mile, LNAV Cat C and D and Circling Cat C visibility ¼ mile. VDP NA with Midland Intl Air and Space Port altimeter setting. Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting.


MALS

MISSED APPROACH: Climb to 5000 direct JEMBI and hold.

ASOS	MIDLAND APP CON ★	CLNC DEL	UNICOM
119.275	124.6 256.875	121.7	123.0 (CTAF) L

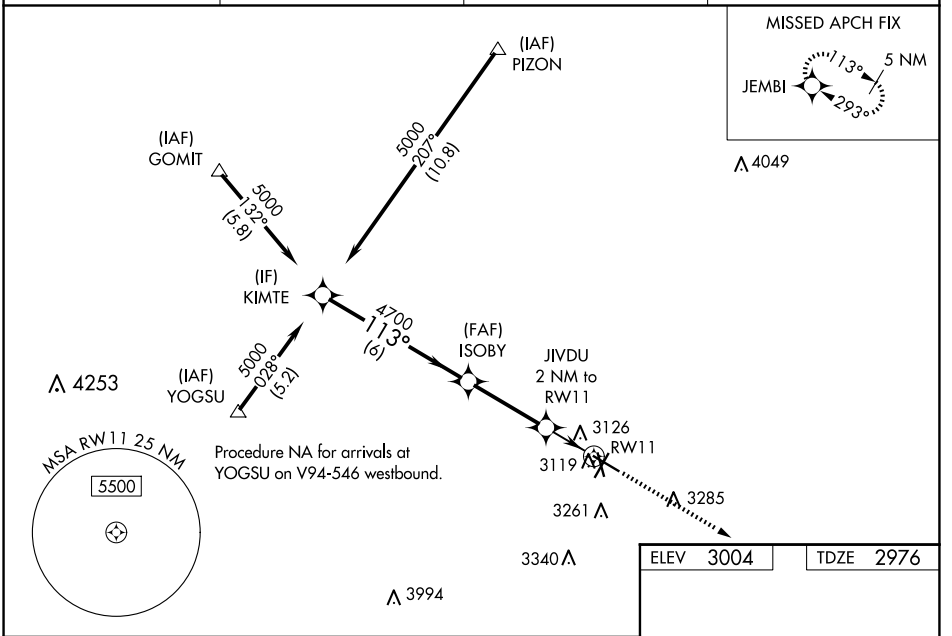

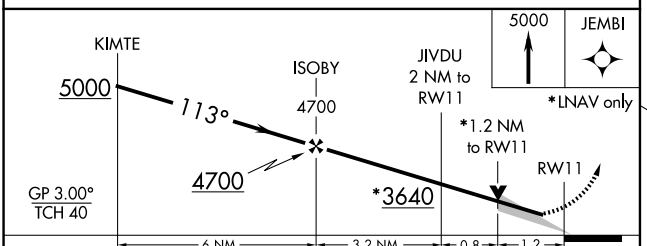



CATEGORY	A	B	C	D
LPV DA	3176-¾ 200 (200-¾)			
LNAV/VNAV DA	3347-1¼ 371 (400-1¼)			
LNAV MDA	3380-1 404 (400-1)		3380-1⅛ 404 (400-1⅛)	
CIRCLING	3460-1 456 (500-1)		3600-1½ 596 (600-1½)	3600-2 596 (600-2)

MIRL Rwys 2-20, 11-29, and 16-34 L

SC-3, 01 OCT 2026 to 29 OCT 2026
SC-3, 01 OCT 2026 to 29 OCT 2026