


WAAS CH 86318 W29A	APP CRS 293°	Rwy Idg 6200 TDZE 2980 Apt Elev 3004
--	------------------------	---

RNAV (GPS) RWY 29


ODESSA-SCHLEMEYER FLD (ODO)

RNP APCH.	Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 43°C. Circling NA south of Rwy 2 and 34. When local altimeter setting not received use Midland Intl Air and Space Port altimeter setting and increase all DAs 41 feet and all MDAs 60 feet and increase LNAV Cats C and D visibility ¼ SM, Circling Cat C visibility ¼ SM. VDP NA with Midland Intl Air and Space Port altimeter setting.	MALS 	MISSED APPROACH: Climb to 5000 direct KIMTE and hold.

ASOS 119.275	MIDLAND APP CON★ 124.6 256.875	CLNC DEL 121.7	UNICOM 123.0 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

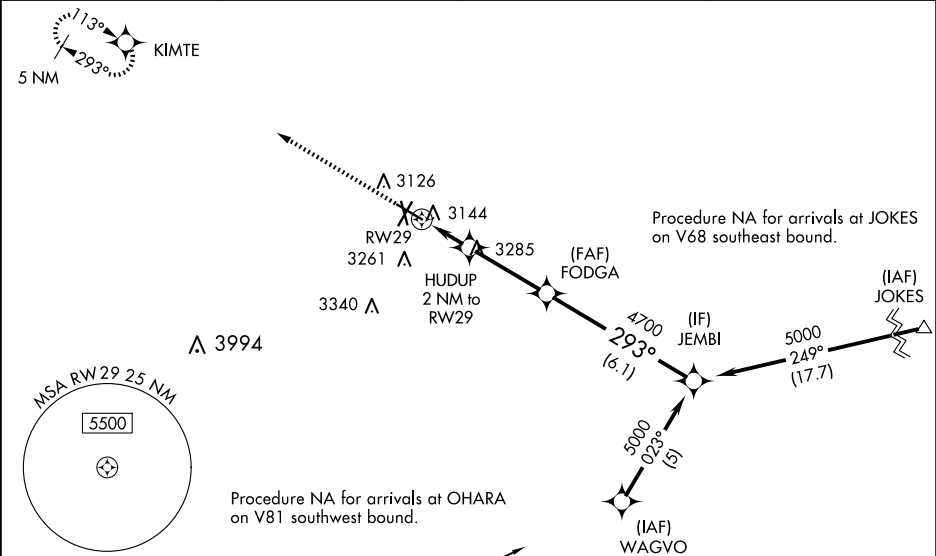

ELEV 3004	TDZE 2980
------------------	------------------

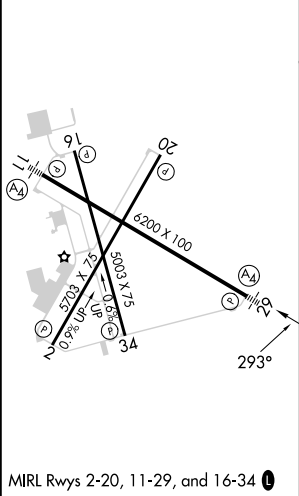

OHARA 5000 KIMTE 5000 057° (12) 5000 023° (5) 4700 293° 5000 249° (17.7) JOKES Procedure NA for arrivals at OHARA on V81 southwest bound. Procedure NA for arrivals at JOKES on V68 southeast bound. Procedure NA for arrivals at JEMBI on V68 southeast bound. Procedure NA for arrivals at WAGVO on V68 southeast bound.					
* LNAV only. HUDUP 2 NM to RW29 3660* 1.2 0.8 3.2 NM 6.1 NM GP 3.00° TCH 40					
CATEGORY	A		B	C	D
LPV DA	3180- ³ / ₄ 200 (200- ³ / ₄)				
LNAV/VNAV DA	3414-1 ¹ / ₂ 434 (500-1 ¹ / ₂)				
LNAV MDA	3400-1	420 (500-1)	3400-1 ¹ / ₄	420 (500-1 ¹ / ₄)	
CIRCLING	3460-1	456 (500-1)	3600-1 ¹ / ₂	3600-2	
			596 (600-1 ¹ / ₂)	596 (600-2)	