

WAAS
CH **66002**
W05A

APP CRS
053°

Rwy Ldg
TDZE
Apt Elev
7001
683
683

RNAV (GPS) RWY 5
CHARLOTTE/MONROE EXEC (EQY)

RNP APCH-GPS.

▼

⚠

Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to $\frac{1}{2}$ SM and LNAV all Cats visibility to 1 SM.


MALSR

AS


⚡

MISSED APPROACH: Climb to 1140 then climbing right turn to 2500 direct MOSEE and hold.

ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	CLNC DEL 132.55	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

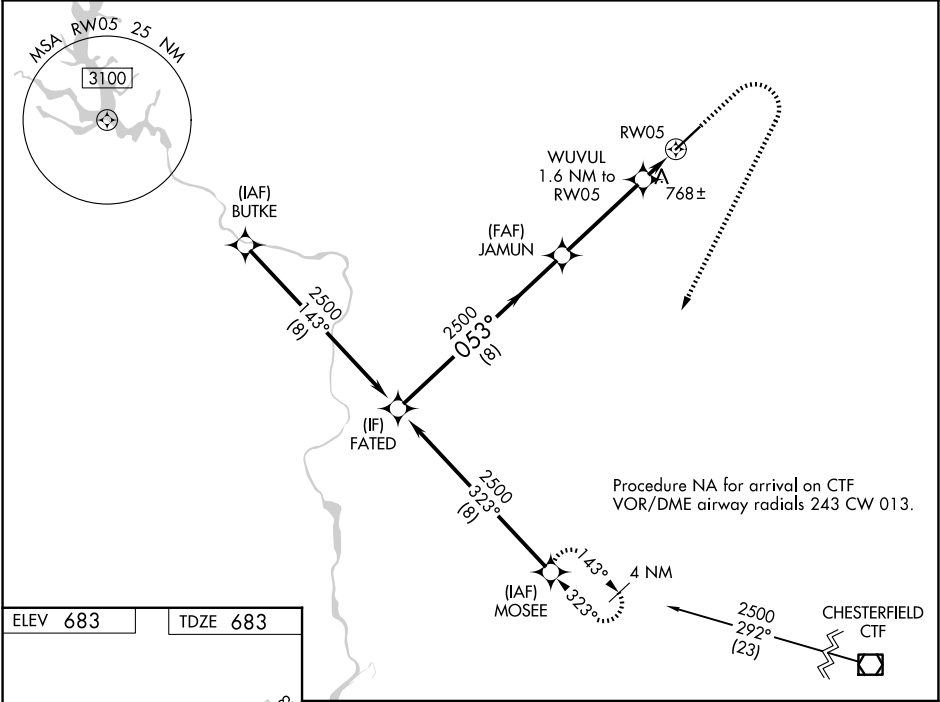

ELEV 683	TDZE 683
----------	----------

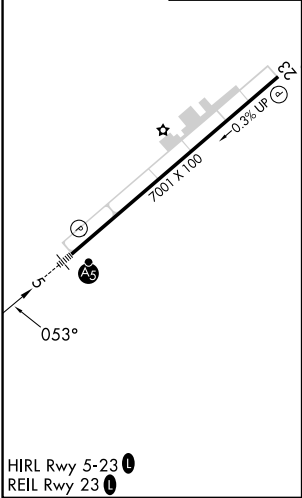

		1140	2500	MOSEE
CATEGORY	A	B	C	D
LPV DA	933-¾ 250 (300-¾)			
LNAV/VNAV DA	1001-¾ 318 (400-¾)			
LNAV MDA	1020-¾ 337 (400-¾)			
CIRCLING	1220-1	537 (600-1)	1220-1½ 537 (600-1½)	1480-2½ 797 (800-2½)