

WAAS
CH **72824**
W16A

APP CRS
157°

Rwy Ldg
TDZE
Apt Elev

5000
413
413

RNAV (GPS) RWY 16

MC COMB/PIKE COUNTY/JOHN E LEWIS FLD (MCB)

RNP APCH.

▼



▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM.

MALSF

MISSED APPROACH:
Climb to 3000 direct
GLADS and hold.

ASOS 119.025	HOUSTON CENTER 126.8 327.8	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	----------------------------------

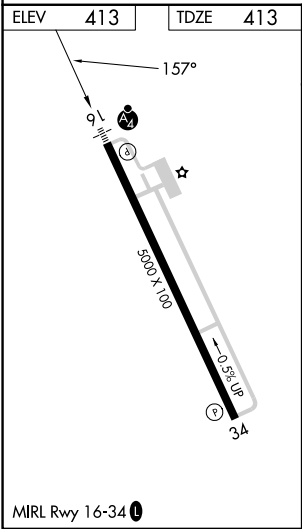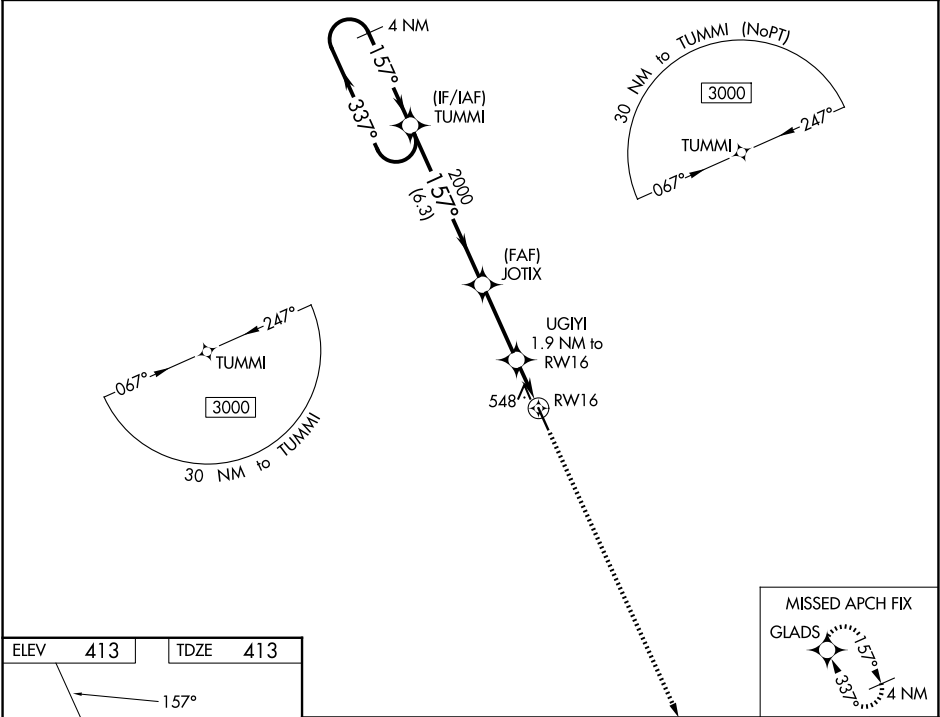

4 NM Holding Pattern				TUMMI	JOTIX	UGIM	RW16
3000				157°	2000	1.9 NM to RW16	
GP 3.00°				157°	2000	*1.1 NM to RW16	
TCH 42				157°	2000	*1060	
				6.3 NM	3 NM	0.8	1.1
CATEGORY	A	B	C	D			
LPV DA	615-¾			202 (300-¾)			
LNAV/VNAV DA	709-¾			296 (300-¾)			
LNAV MDA	800-¾	387 (400-¾)	800-7/8	387 (400-7/8)			
CIRCLING	880-1	467 (500-1)	940-1½	1160-2½	527 (600-1½)	747 (800-2½)	