WAAS	APP CRS	Rwy Ldg	5501
CH 99624	047°	TDZE	132
W05A		Apt Elev	133


RNAV (GPS) RWY 5


WAYNE EXEC JETPORT (GWW)

Baro-VNAV NA when using Smithfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Smithfield altimeter setting. When local altimeter setting not received, use Smithfield altimeter setting and increase LPV DA to 490 feet, LNAV/VNAV DA to 462 and all MDA 60 feet, increase LPV and LNAV/VNAV all Cats visibility ⅛ SM, and Circling visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 2000 direct JONVA and hold.

AWOS-3P	SEYMOUR JOHNSON APP CON ★	UNICOM
118.975	121.175 290.9	122.975 (CTAF) L

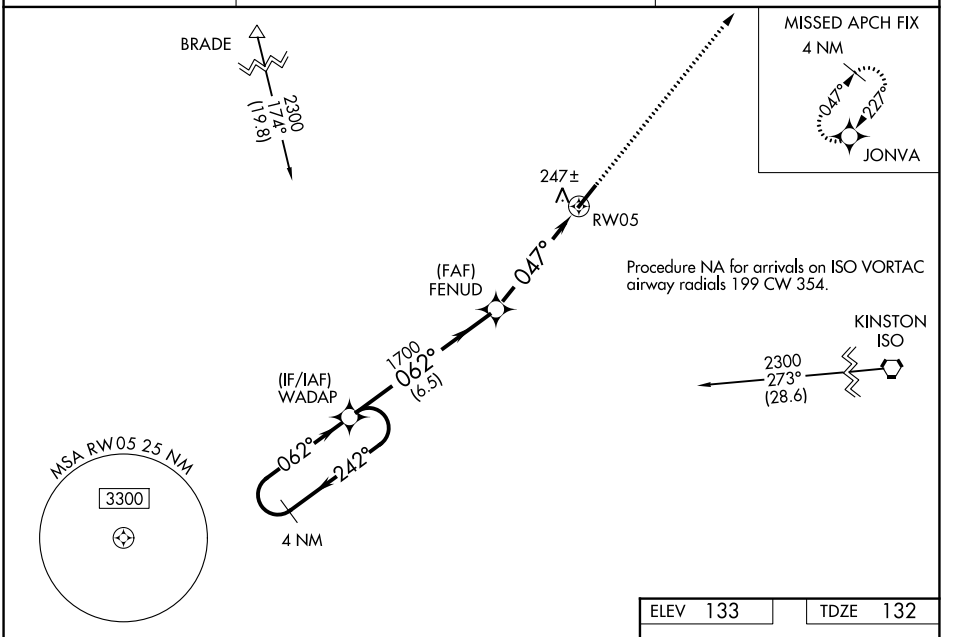

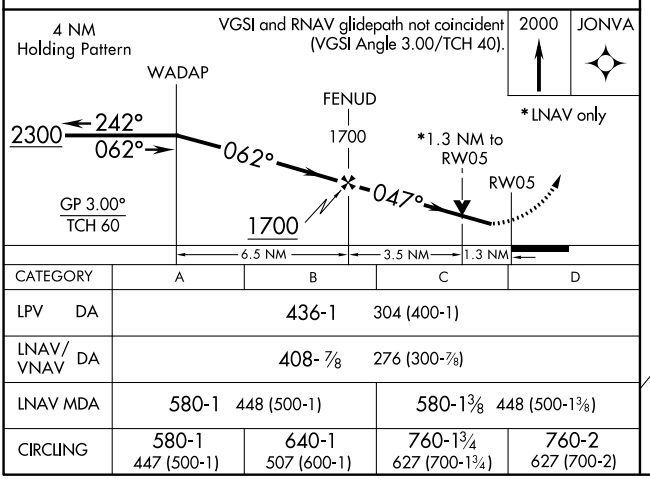

CATEGORY	A	B	C	D
LPV DA	436-1		304 (400-1)	
LNAV/VNAV DA	408-⅞		276 (300-⅞)	
LNAV MDA	580-1 448 (500-1)		580-1⅜ 448 (500-1⅜)	
CIRCLING	580-1 447 (500-1)	640-1 507 (600-1)	760-1¾ 627 (700-1¾)	760-2 627 (700-2)

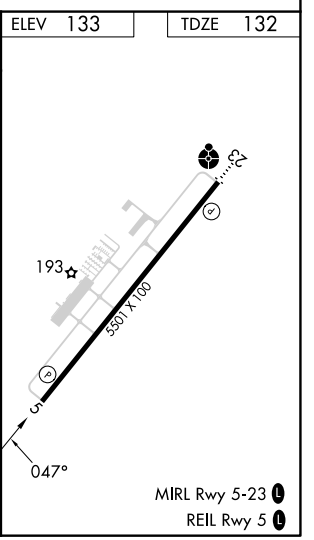

MIRL Rwy 5-23 L
REIL Rwy 5 L

SE-2, 01 OCT 2026 to 29 OCT 2026
SE-2, 01 OCT 2026 to 29 OCT 2026