


WAAS		Rwy Ldg	5801
CH 42901	APP CRS	TDZE	730
W18A	185°	Apt Elev	730

RNAV (GPS) RWY 18

WATERBURY-OXFORD (OXC)

RNP APCH - GPS.	Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using DXR altimeter setting. When local altimeter setting not received, use DXR altimeter setting: increase LPV DA to 1218 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1219 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¾ SM, and Circling visibility Cat C and D ¼ SM.	MISSED APPROACH: Climb to 2600 direct CUTMA and hold.
-----------------	--	--

ATIS 132.975	NEW YORK APP CON 124.075 343.65	OXFORD TOWER ★ 118.475 (CTAF) 0	GND CON 121.65	UNICOM 122.95
-----------------	------------------------------------	------------------------------------	-------------------	------------------

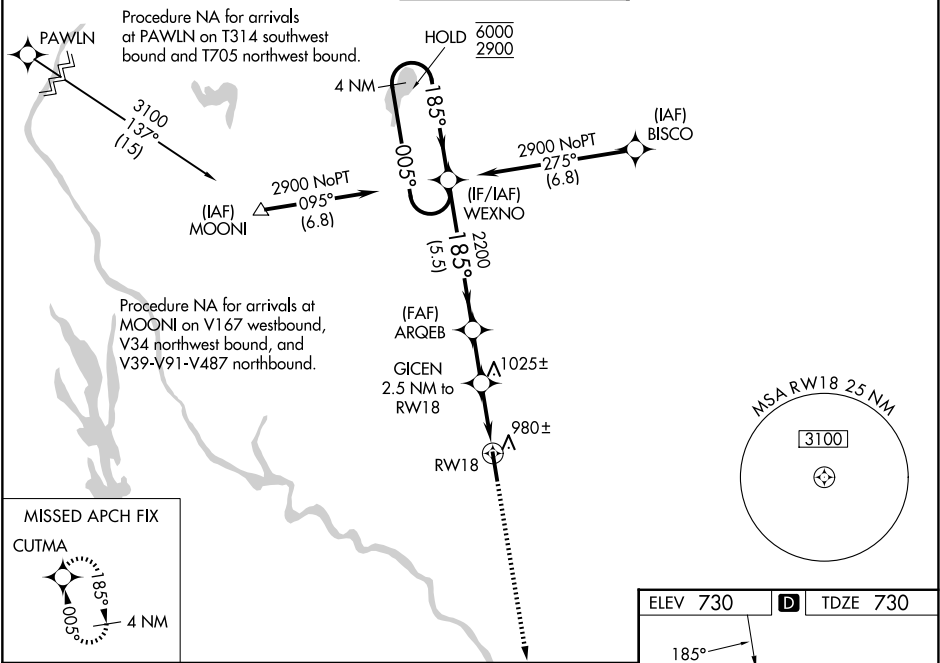

4 NM Holding Pattern WEXNO		ARQEB	GICEN 2.5 NM to RW18	2600	CUTMA
6000 ← 005°		2200	1580	1.5 NM to RW18	RW18
2900 ← 185°					
GP 3.00° TCH 47					
5.5 NM		2 NM	1.1 NM	1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	1140-1½		410 (500-1½)		
LNAV/VNAV DA	1141-1½		411 (500-1½)		
LNAV MDA	1240-1	510 (600-1)	1240-1¾	510 (600-1¾)	
CIRCLING	1360-1	630 (700-1)	1380-1¾	1460-2¼	730 (800-2¼)

