

WAAS CH 45717 W20A	APP CRS 202°	Rwy Idg TDZE Apt Elev	6450 874 874
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

MCMINN COUNTY (MMI)



RNP APCH - GPS.

- ⚠ Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using Mc Ghee Tyson altimeter setting.

⚠ Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Mc Ghee Tyson altimeter setting: increase LPV DA to 1275 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1819 feet and visibility all Cats 1½ SM; increase all MDAs 120 feet and LNAV visibility Cat C and D ½ SM, and Circling visibility Cat A and C ¼ SM.

MISSED APPROACH:
Climb to 4100 direct
ZAGUG and hold.

AWOS-3 125.425	KNOXVILLE APP CON 123.9 353.6	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

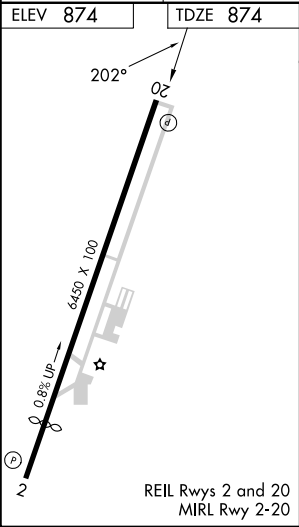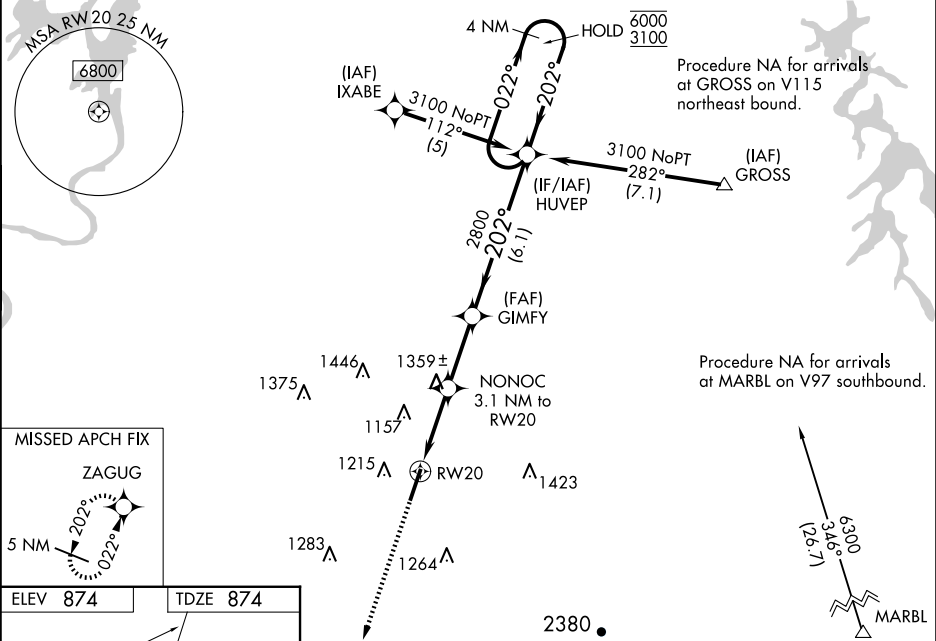

4100

ZAGUG

NONOC

3.1 NM to RW20

GIMFY

2800

HUVEP

4 NM Holding Pattern

2.2 NM to RW20

RW20

1900

2800

022° → 6000

← 202° 3100

GP 3.00°

TCH 40

2.2

0.9

2.7 NM

6.1 NM

CATEGORY

A

B

C

D

LPV DA

1174-1

300 (300-1)

LNAV/VNAV DA

1718-2½

844 (900-2½)

LNAV MDA

1620-1
746 (800-1)

1620-1¼
746 (800-1¼)

1620-2

746 (800-2)

CIRCLING

1620-1
746 (800-1)

1620-1¼
746 (800-1¼)

1620-2¼
746 (800-2¼)

1820-3
946 (1000-3)