

NOTE: Chart not to scale.

TOP ALTITUDE:
3000


RNAV 1 - DME/DME/IRU or GPS.

RADAR required.

CHARLOTTE DEP CON
120.05 307.8
AWOS-3
120.825
GCO
121.725

TAKEOFF MINIMUMS

Rwy 6: 300-1¼ or standard with minimum climb of 268'/NM to 700.
Rwy 24: 300-1¼ or standard with minimum climb of 275'/NM to 700.

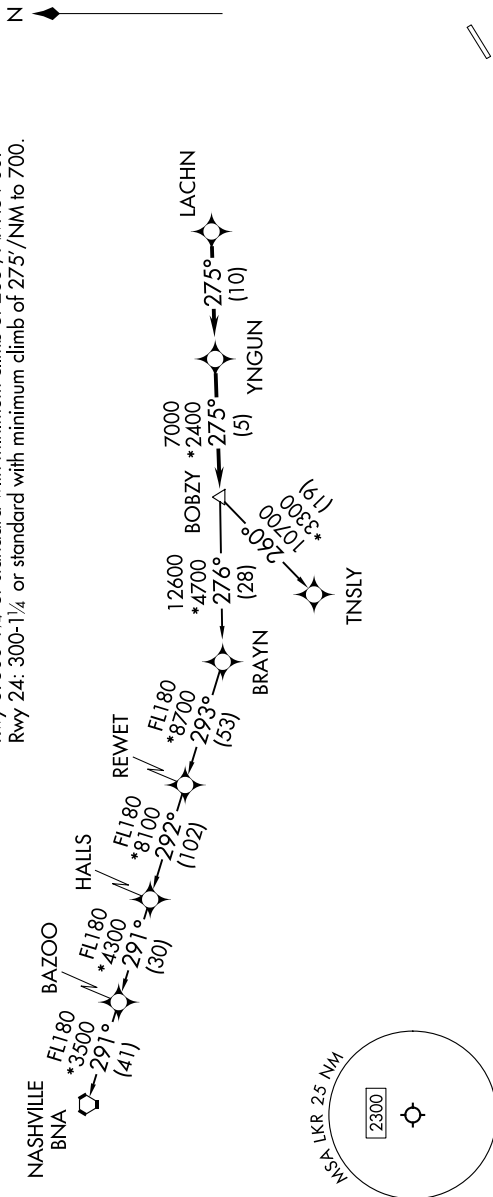

DEPARTURE ROUTE DESCRIPTION

NOTE: Turbojet only.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

Climb on assigned heading for vectors to LACHN, then on depicted route to BOBZY, then on assigned transition. Maintain 3000. Expect filed altitude 10 minutes after departure.

NASHVILLE TRANSITION (BOBZY8.BNA)
TNSLY TRANSITION (BOBZY8.TNSLY)

LANCASTER COUNTY-MC WHIRTER FLD (LKR)